


T872N1036/  
Q672F1299  
OR  
T874N1024/  
Q674F1261  
T872R1164/  
Q672L1165  
OR  
T874R1170/  
Q674L1181

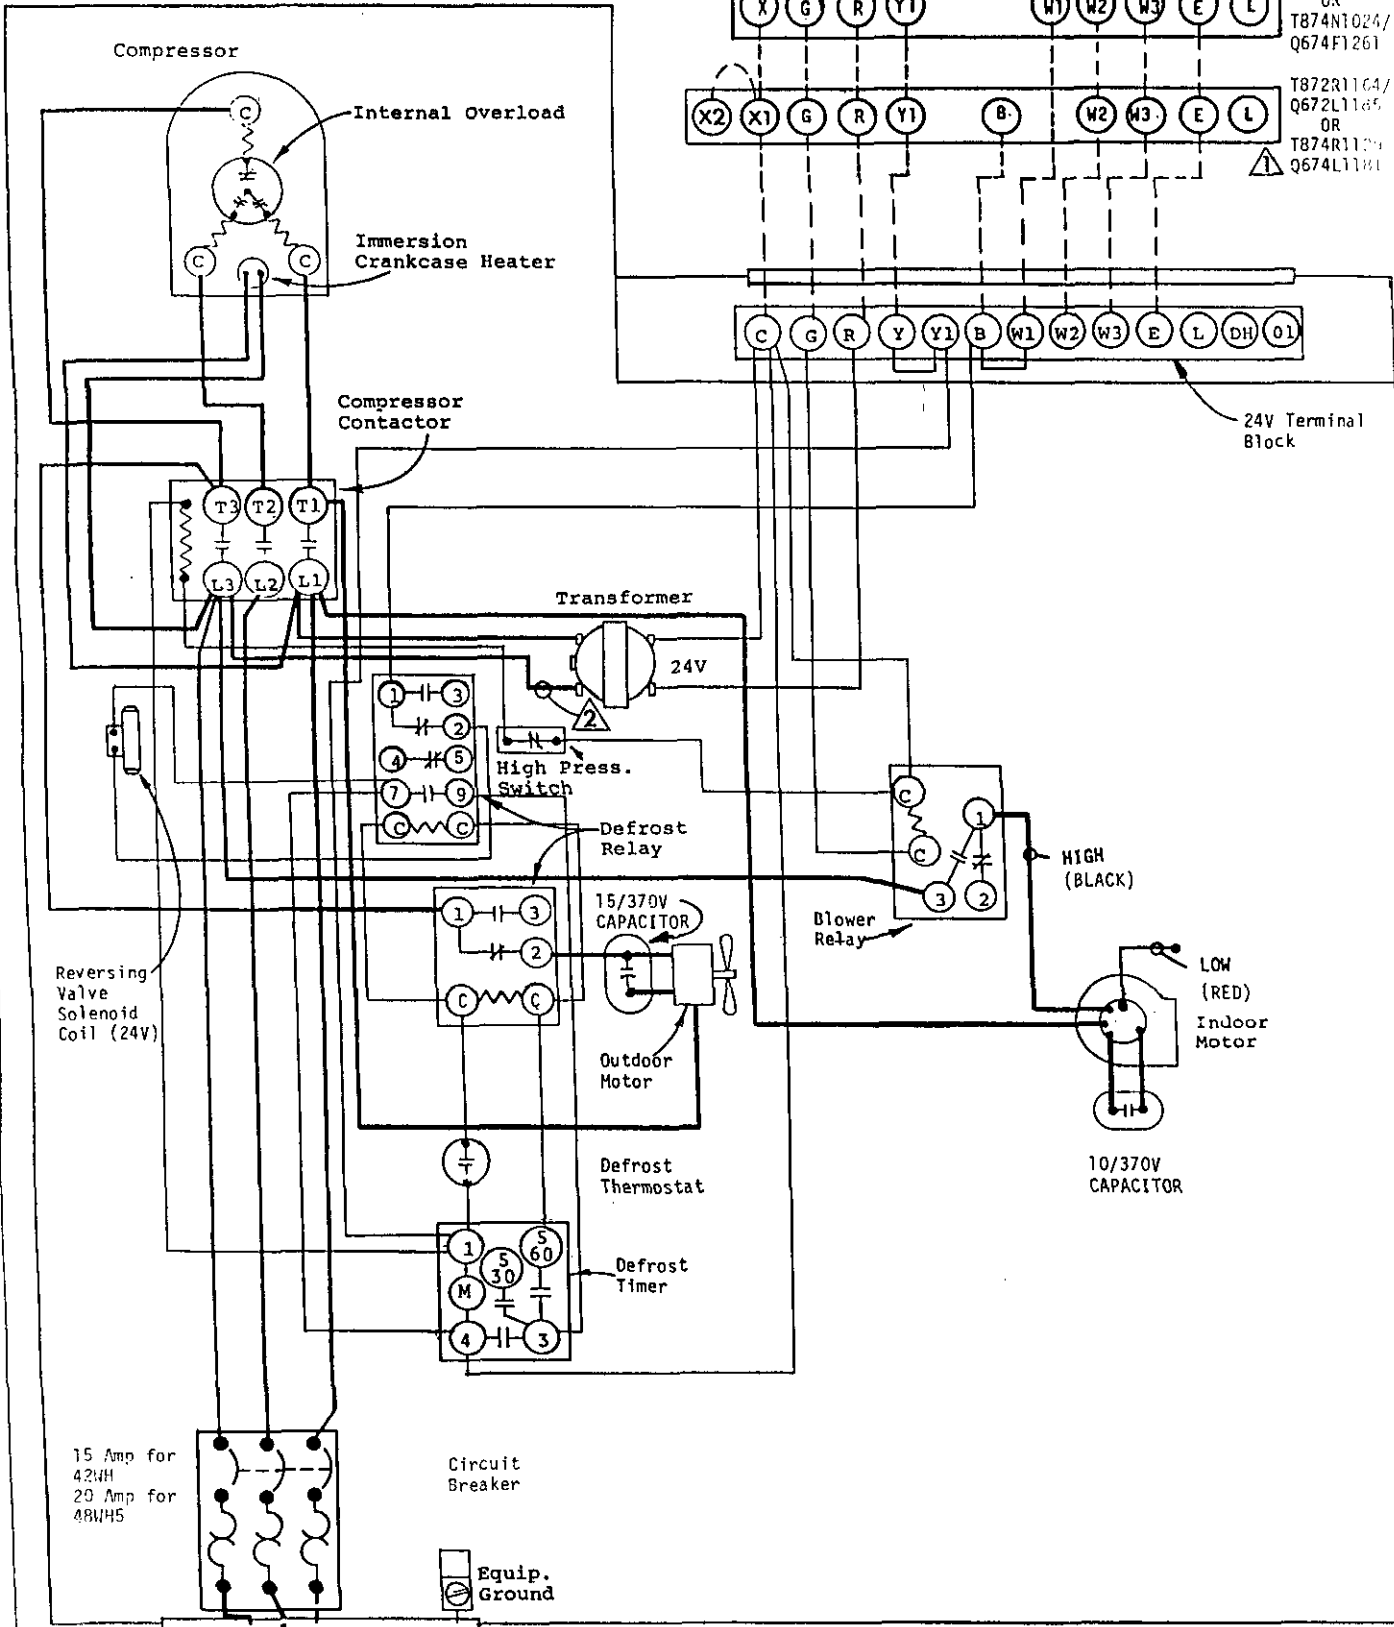

24V Terminal Block

Reversing Valve Solenoid Coil (24V)

15 Amp for 42NH  
20 Amp for 48NH5

Circuit Breaker

Equip. Ground

USE COPPER OR ALUMINUM WIRE

Fused Disconnect Switch

460-60-3

| FACTORY WIRING   | FIELD WIRING |
|------------------|--------------|
| Low Voltage ———  | -----        |
| High Voltage ——— | -----        |

- ⚠ If there is an X1 and X2 terminal on Q674L1181, jumper them together and connect from C to either one.
- ⚠ For 208V operation move this wire to 208V transformer tap.