


CHART A

TECHNICAL INFORMATION

MODEL	INPUT RATE GPH	HEATING BLOWER SPEED (COLOR)	COOLING BLOWER SPEED (COLOR)	TEMP. RISE RANGE
FLF085D36C	.65	LOW (RED)	HIGH (BLACK)	60°-90°
FLR085D36C	.75	MED (BLUE)	HIGH (BLACK)	60°-90°
FLF110D48C	.85	MED LOW (ORANGE)	HIGH (BLACK)	60°-90°
FLR110D48C	1.00	MED HIGH (BLUE)	HIGH (BLACK)	60°-90°
FLR140D60C	1.10	MED LOW (ORANGE)	HIGH (BLACK)	60°-90°
	1.25	MED HIGH (BLUE)	HIGH (BLACK)	60°-90°

CAPACITOR RATING

1/3 HP MOTOR	5/370
1/2 HP MOTOR	7.5/370
3/4 HP MOTOR	15/370

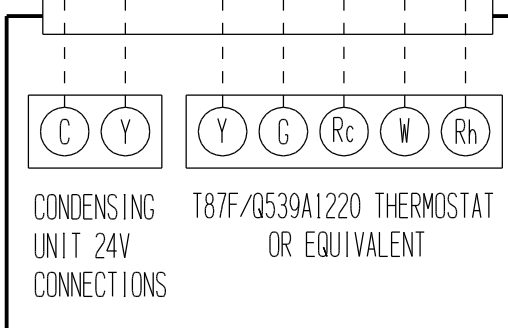

- ① WIRED FOR INTERRUPTED IGNITION. CAN BE REWIRED FOR CONTINUOUS DUTY IGNITION BY CHANGING WIRE TO " MOTOR " TERMINAL
- ② FACTORY WIRED USING BLUE WIRE
- ③ FACTORY WIRED USING BLACK WIRE

MOTOR COLOR CODE

COLOR	4 SPEED	3 SPEED
WHITE	COMMON CAP	COMMON CAP
BROWN	HIGH	HIGH
BLACK	MED HI	MED LOW
BLUE	MED LOW	LOW
RED	LOW	---
ORANGE	---	---

CONNECTION DIAGRAM

DANGER: ELECTRICAL SHOCK HAZARD
DISCONNECT POWER BEFORE SERVICING

IF ANY OF THE ORIGINAL WIRE AS SUPPLIED WITH THE APPLIANCE MUST BE REPLACED, IT MUST BE REPLACED WITH WIRING MATERIAL HAVING A TEMPERATURE RATING OF AT LEAST 105 DEG C.

