

CONNECTION DIAGRAM DANGER: ELECTRICAL SHOCK HAZARD
DISCONNECT POWER BEFORE SERVICING.

CHART A (FACTORY SETTINGS)


| MODEL | INPUT RATE GPH | HEATING BLOWER SPEED (COLOR) | COOLING BLOWER SPEED (COLOR) | TEMP. RISE RANGE |
|-----------|-------------------|---------------------------------|---------------------------------|---------------------|
| FC085D36C | .65 | LOW (RED) | HIGH (BLACK) | 50° - 80° |
| | .75 | MED (BLUE) | HIGH (BLACK) | 60° - 90° |

CHART B (COOLING BLOWER SPEEDS)

| MODEL | NOMINAL AC (TONS) | SPEED (COLOR) | CFM @ .50" WC |
|-----------|----------------------|---------------|------------------|
| FC085D36C | 2 | LOW (RED) | 775 |
| | 2.5 | MED (BLUE) | 1070 |
| | 3 | HIGH (BLACK) | 1230 |

| MOTOR COLOR CODE | 3 SPEED |
|------------------|---------|
| WHITE | COMMON |
| BROWN | CAP |
| BLACK | HIGH |
| BLUE | MED |
| ORANGE | --- |
| RED | LOW |

SPEED TAPS AVAILABLE FOR HEATING AND COOLING INPUT RATINGS. SEE CHARTS A AND B.
NOTE: ONLY ONE HEATING AND ONE COOLING SPEED CAN BE CONNECTED. THE OTHER SPEED TAPS MUST BE TAPED OFF INDEPENDENTLY FROM ALL OTHER WIRES.

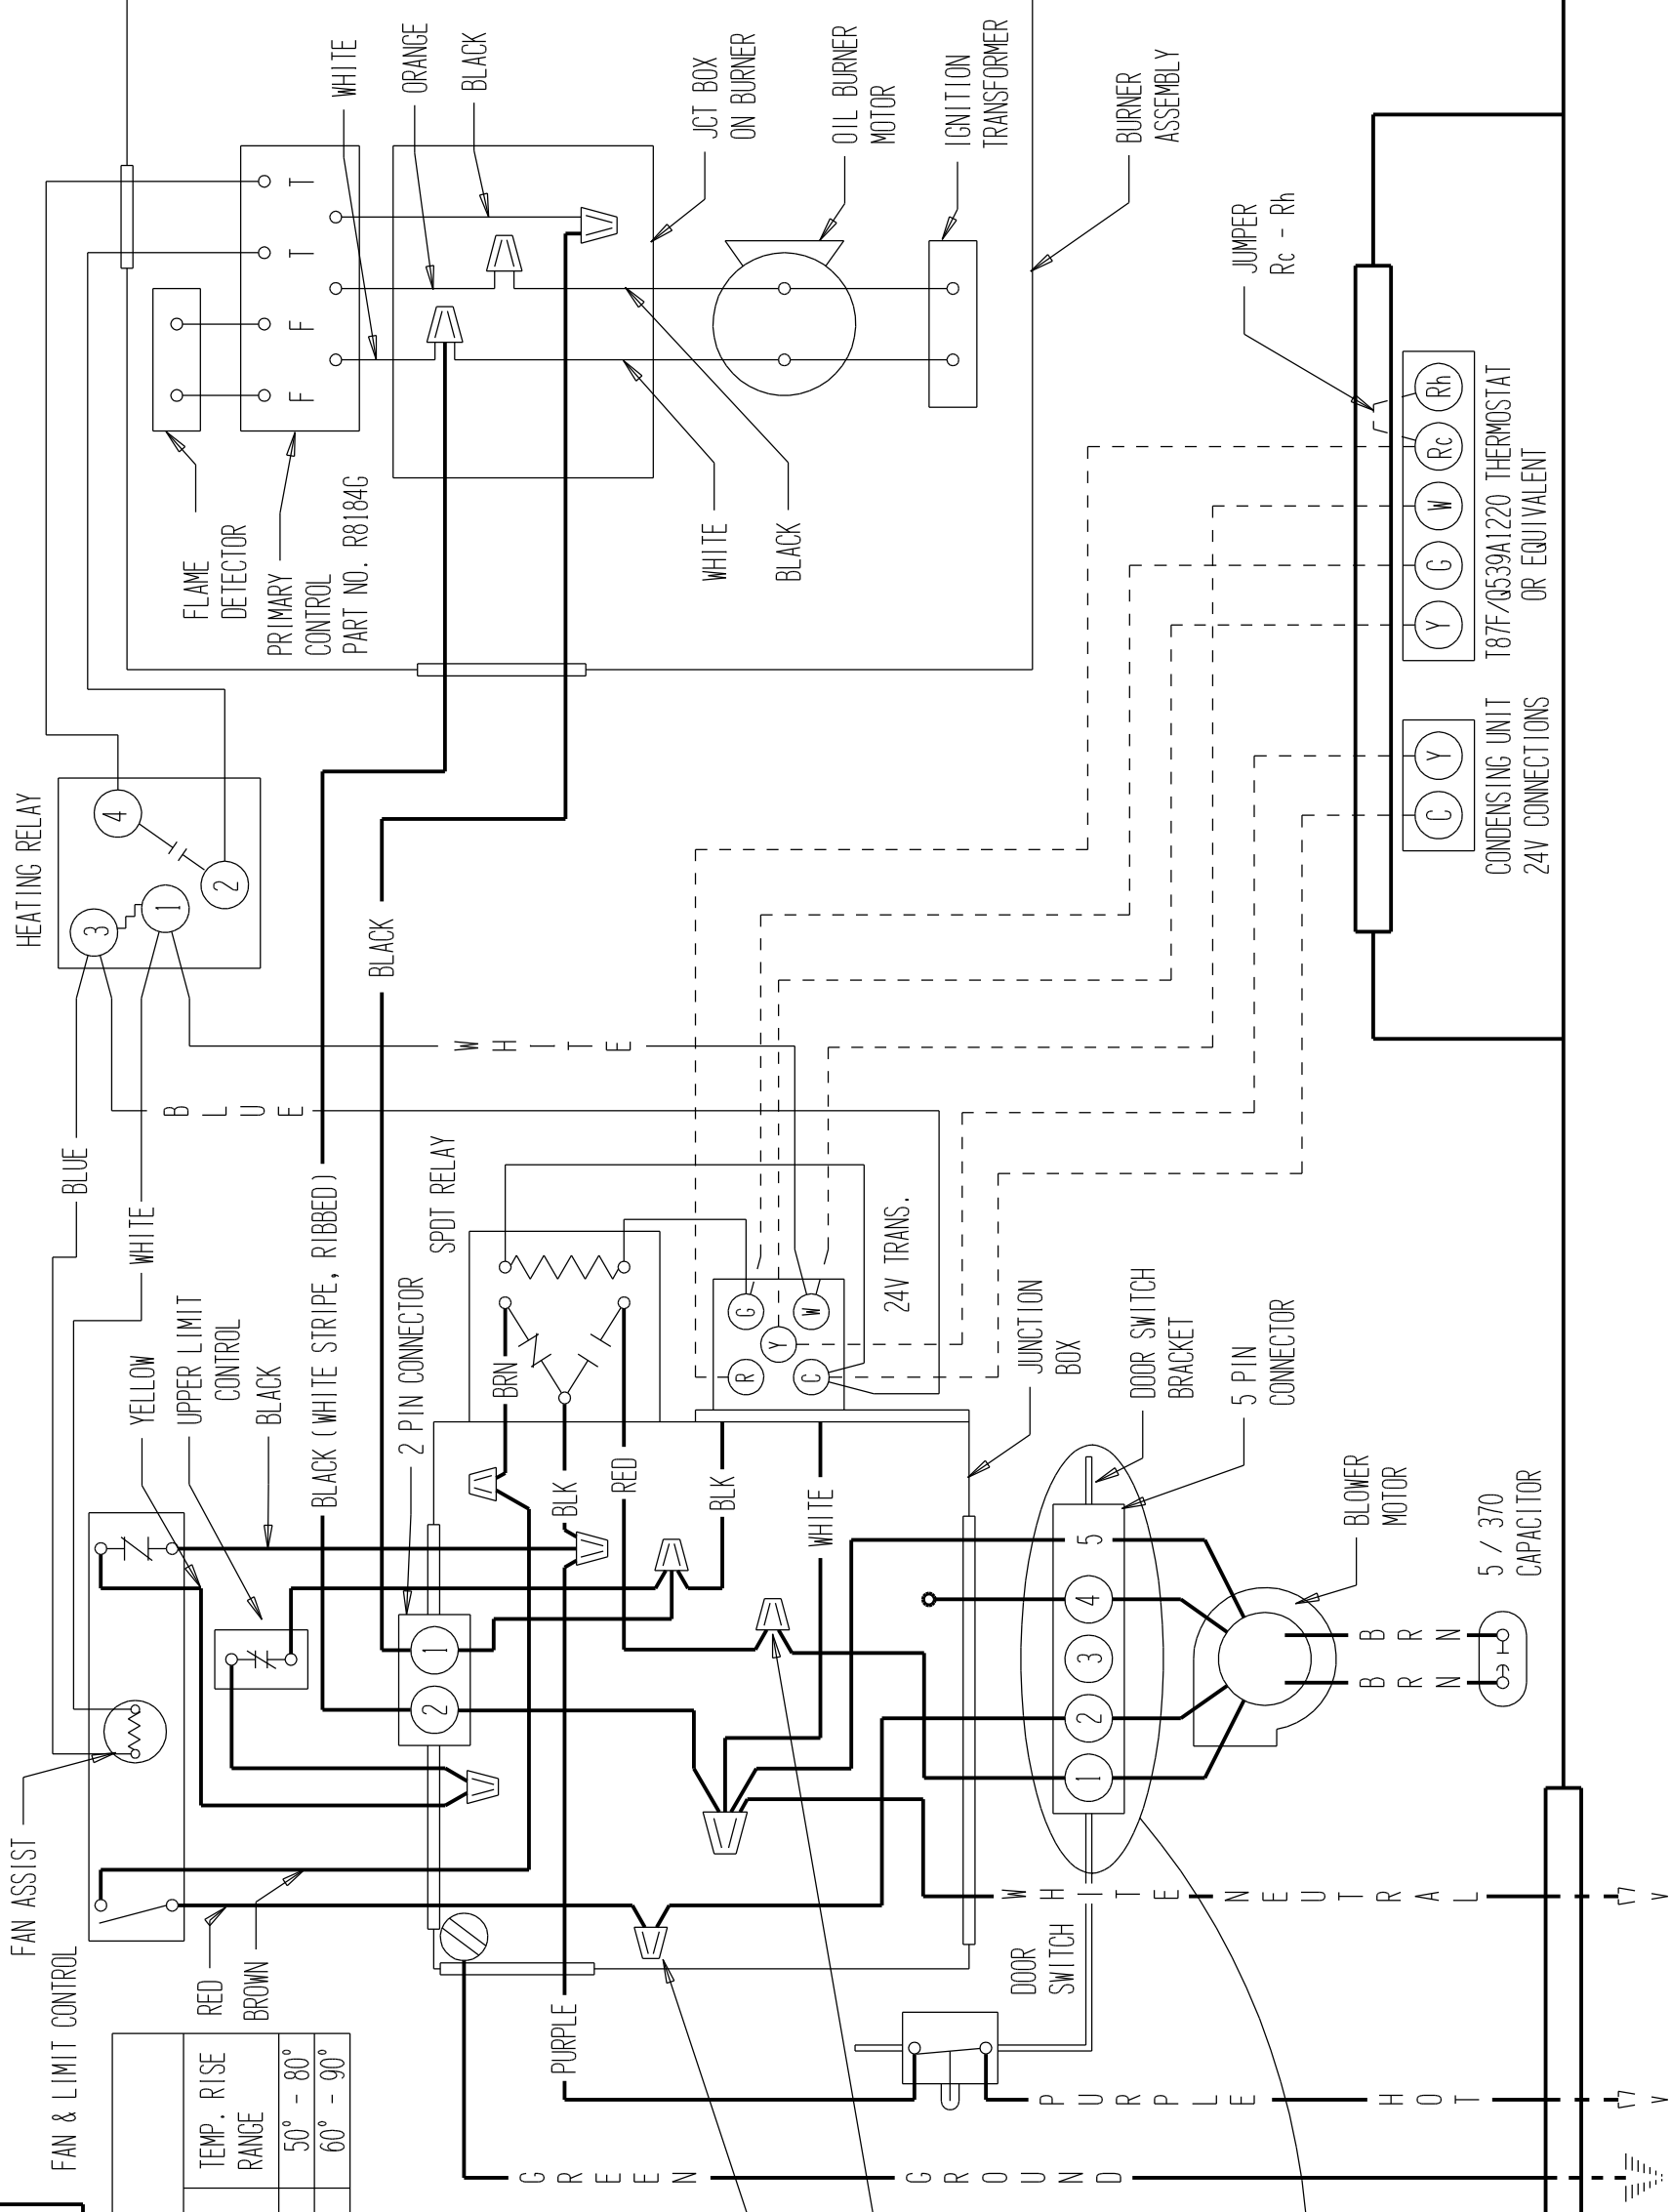

115-60-1

IF ANY OF THE ORIGINAL WIRE AS SUPPLIED WITH THE APPLANCE MUST BE REPLACED, IT MUST BE REPLACED WITH WIRING MATERIAL HAVING A TEMPERATURE RATING OF AT LEAST 105 DEG C.

