


CONNECTION DIAGRAM DANGER: ELECTRICAL SHOCK HAZARD
DISCONNECT POWER BEFORE SERVICING.

FACTORY SETTINGS (CHART A)				
MODEL	INPUT RATE	HEATING BLOWER	COOLING BLOWER	TEMPERATURE
	GPH	SPEED (COLOR)	SPEED (COLOR)	RISE RANGE
FH0850360	.65	LOW (RED)	HIGH (BLACK)	70° - 100°
	.75	MED (BLUE)	HIGH (BLACK)	60° - 90°
FH1100480	.85	LOW (RED)	HIGH (BLACK)	70° - 100°
	1.00	MED-LOW (ORANGE)	HIGH (BLACK)	60° - 90°
FH1100600	.85	LOW (RED)	HIGH (BLACK)	60° - 90°
	1.00	MED-LOW (ORANGE)	HIGH (BLACK)	60° - 90°

COOLING BLOWER SPEEDS (CHART B)			
MODEL	NOMINAL A/C TONS	SPEED (COLOR)	CFM e. 50" W.C.
FH0850360	2	LOW (RED)	730
	2 - 1/2	MED (BLUE)	900
	3	HIGH (BLACK)	1160
FH1100480	2 - 1/2	LOW (RED)	1020
	3	MED-LOW (ORANGE)	1280
	3 - 1/2	MED-HIGH (BLUE)	1495
FH1100600	4	HIGH (BLACK)	1640
	3	LOW (RED)	1300
	3 - 1/2	MED-LOW (ORANGE)	1460
	4	MED-HIGH (BLUE)	1660
	5	HIGH (BLACK)	1970


SPEED TAPS AVAILABLE FOR HEATING AND COOLING INPUT RATINGS. SEE CHARTS A AND B.

NOTE: ONLY ONE HEATING AND ONE COOLING SPEED CAN BE CONNECTED. THE OTHER SPEED TAPS MUST BE TAPED OFF INDEPENDENTLY FROM ALL OTHER WIRES.

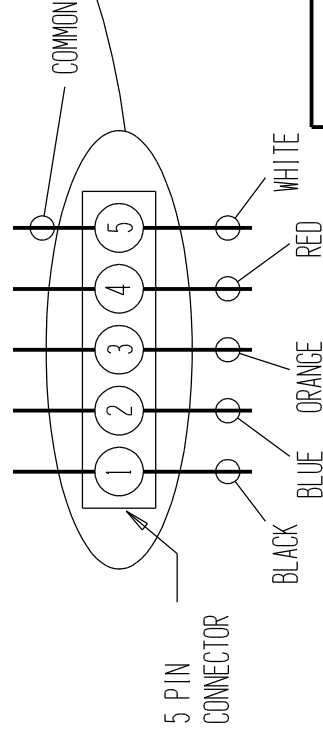

115-60-1

IF ANY OF THE ORIGINAL WIRE AS SUPPLIED WITH THE APPLIANCE MUST BE REPLACED, IT MUST BE REPLACED WITH WIRING MATERIAL HAVING A TEMPERATURE RATING OF AT LEAST 105 DEG C.

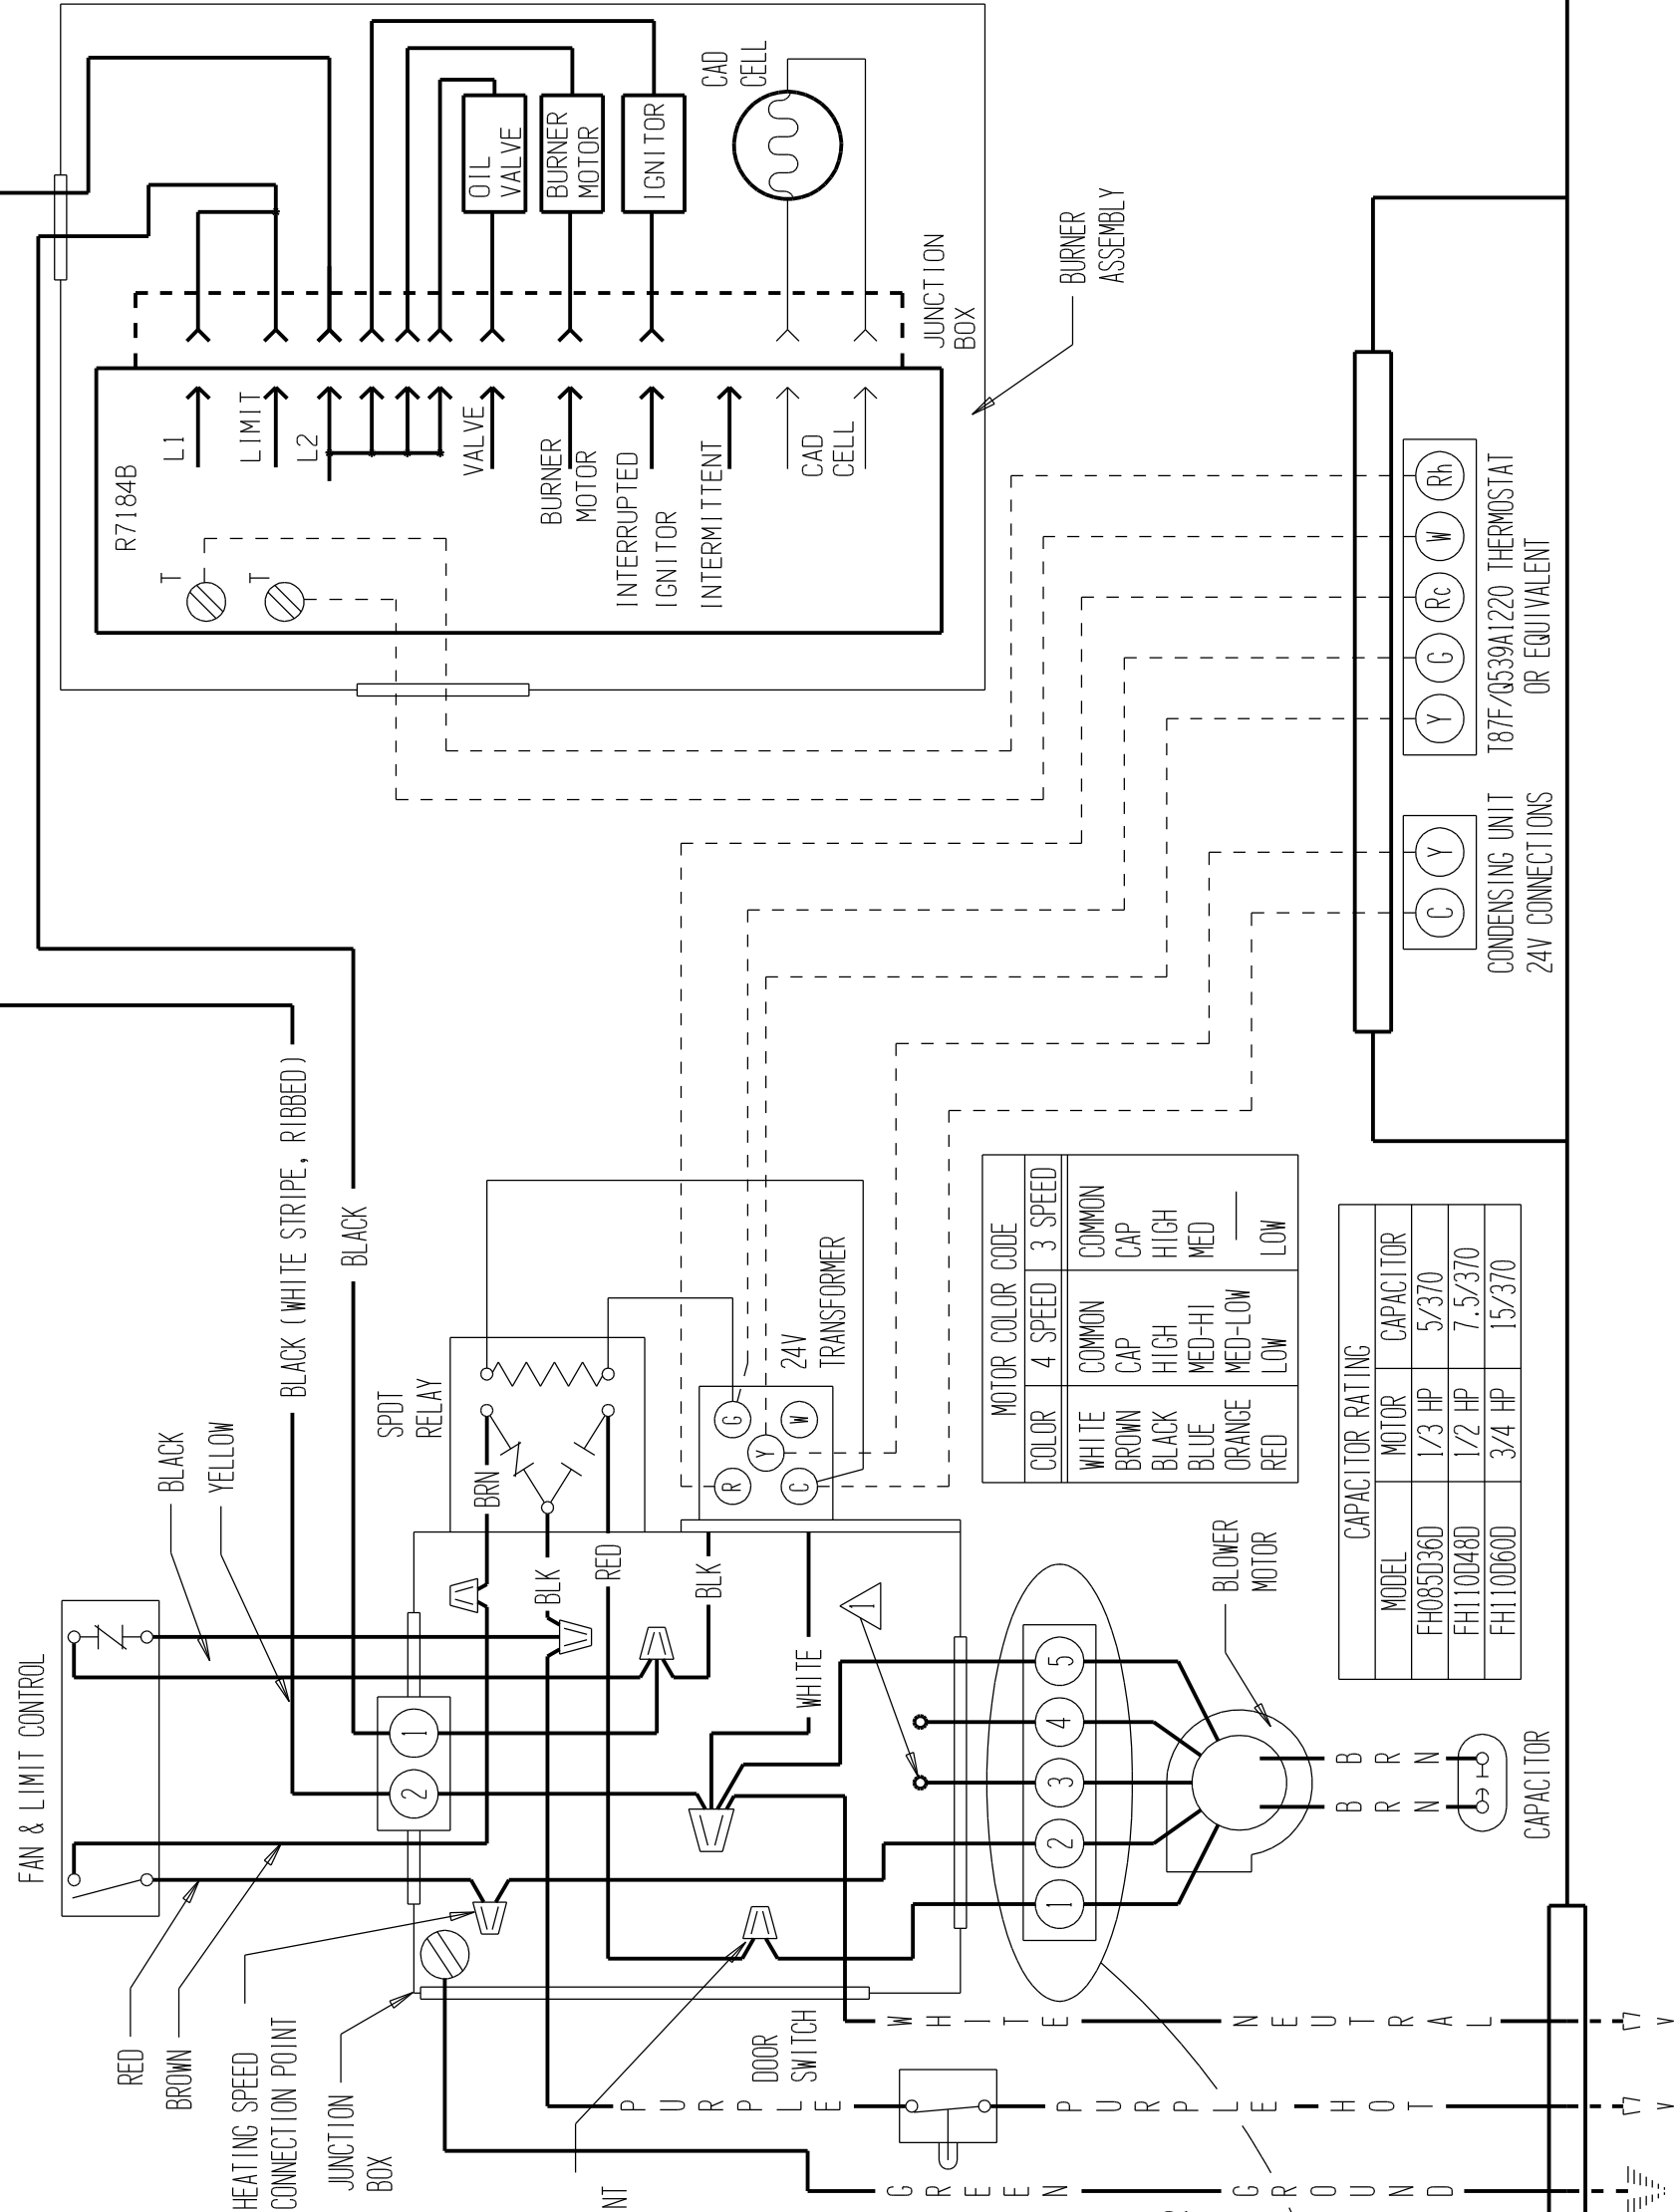

MOTOR COLOR CODE			
COLOR	4 SPEED	3 SPEED	
WHITE	COMMON	COMMON	
BROWN	CAP	CAP	HIGH
BLACK	HIGH	MED-HI	MED
BLUE	MED-HI	MED-LOW	LOW
ORANGE	MED-LOW		
RED	LOW		

CAPACITOR RATING		
MODEL	MOTOR	CAPACITOR
FH0850360	1/3 HP	5/370
FH1100480	1/2 HP	7.5/370
FH1100600	3/4 HP	15/370

⚠ ON FH110 MODELS THE ORANGE (MED-LOW) SPEED IS THE FACTORY CONNECTED HEATING SPEED

