


230/208-60-1
240/220-50-1
PER NAMEPLATE

USE COPPER CONDUCTORS ONLY
SUITABLE FOR AT LEAST 75° C

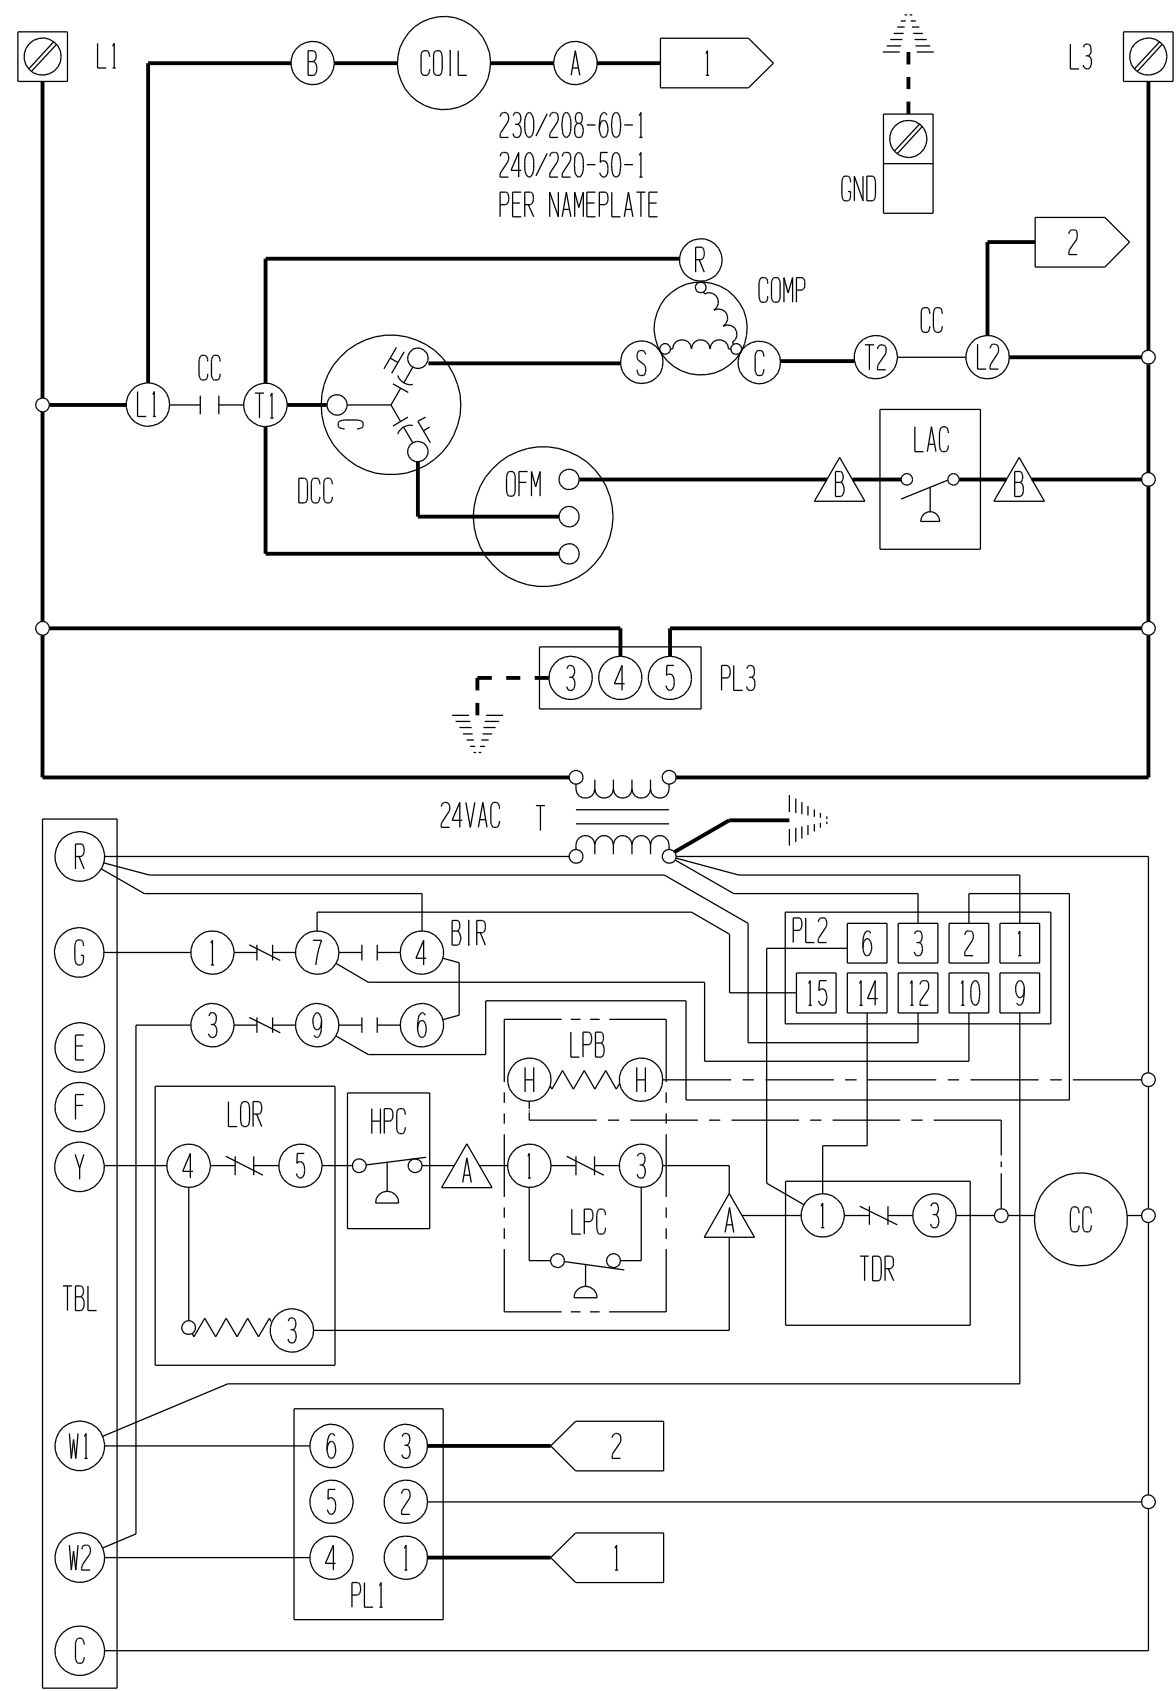

COMPONENT CODE			
BIR	BLOWER INTERLOCK RELAY	LPB	LOW PRESSURE BYPASS
CC	COMPRESSOR CONTACTOR	LPC	LOW PRESSURE CONTROL
COMP	COMPRESSOR	OFM	OUTDOOR FAN MOTOR
DCC	DUAL CAN CAPACITOR	PL1	PLUG #1
GND	EQUIPMENT GROUND	PL2	PLUG #2
HPC	HIGH PRESSURE CONTROL	PL3	PLUG #3
LAC	LOW AMBIENT CONTROL	T	TRANSFORMER
LOR	LOCK OUT RELAY	TB	TERMINAL BLOCK
		TBL	LOW VOLTAGE TERMINAL BLOCK
		TDR	TIME DELAY RELAY

CAPACITOR	PART NO.	MODEL
45/5 370	8552-052	P1224A1
45/5 370	8552-052	P1230A1
50/5 370	8552-063	P1236A1

A, **B** LABELED WIRES CONNECT IF NO OPTIONS USED. **C** MOVE ORANGE WIRE TO 208V TAP FOR 208V OPERATION

	FACTORY STD.	FIELD	OPTIONAL	COLOR CODE							
HIGH VOLTAGE	————	-----	-----	BK	BLACK	Y	YELLOW	V	VIOLET	T	TAN
LOW VOLTAGE	————	-----	-----	BR	BROWN	G	GREEN	(PR)	PURPLE	PK	PINK
ACCESSORY	————	-----	-----	R	RED	BL	BLUE	GY	GRAY	L	LAVENDER
				O	ORANGE	W	WHITE	(S)	SLATE		

BARD MFG. CO.
4063-131 C