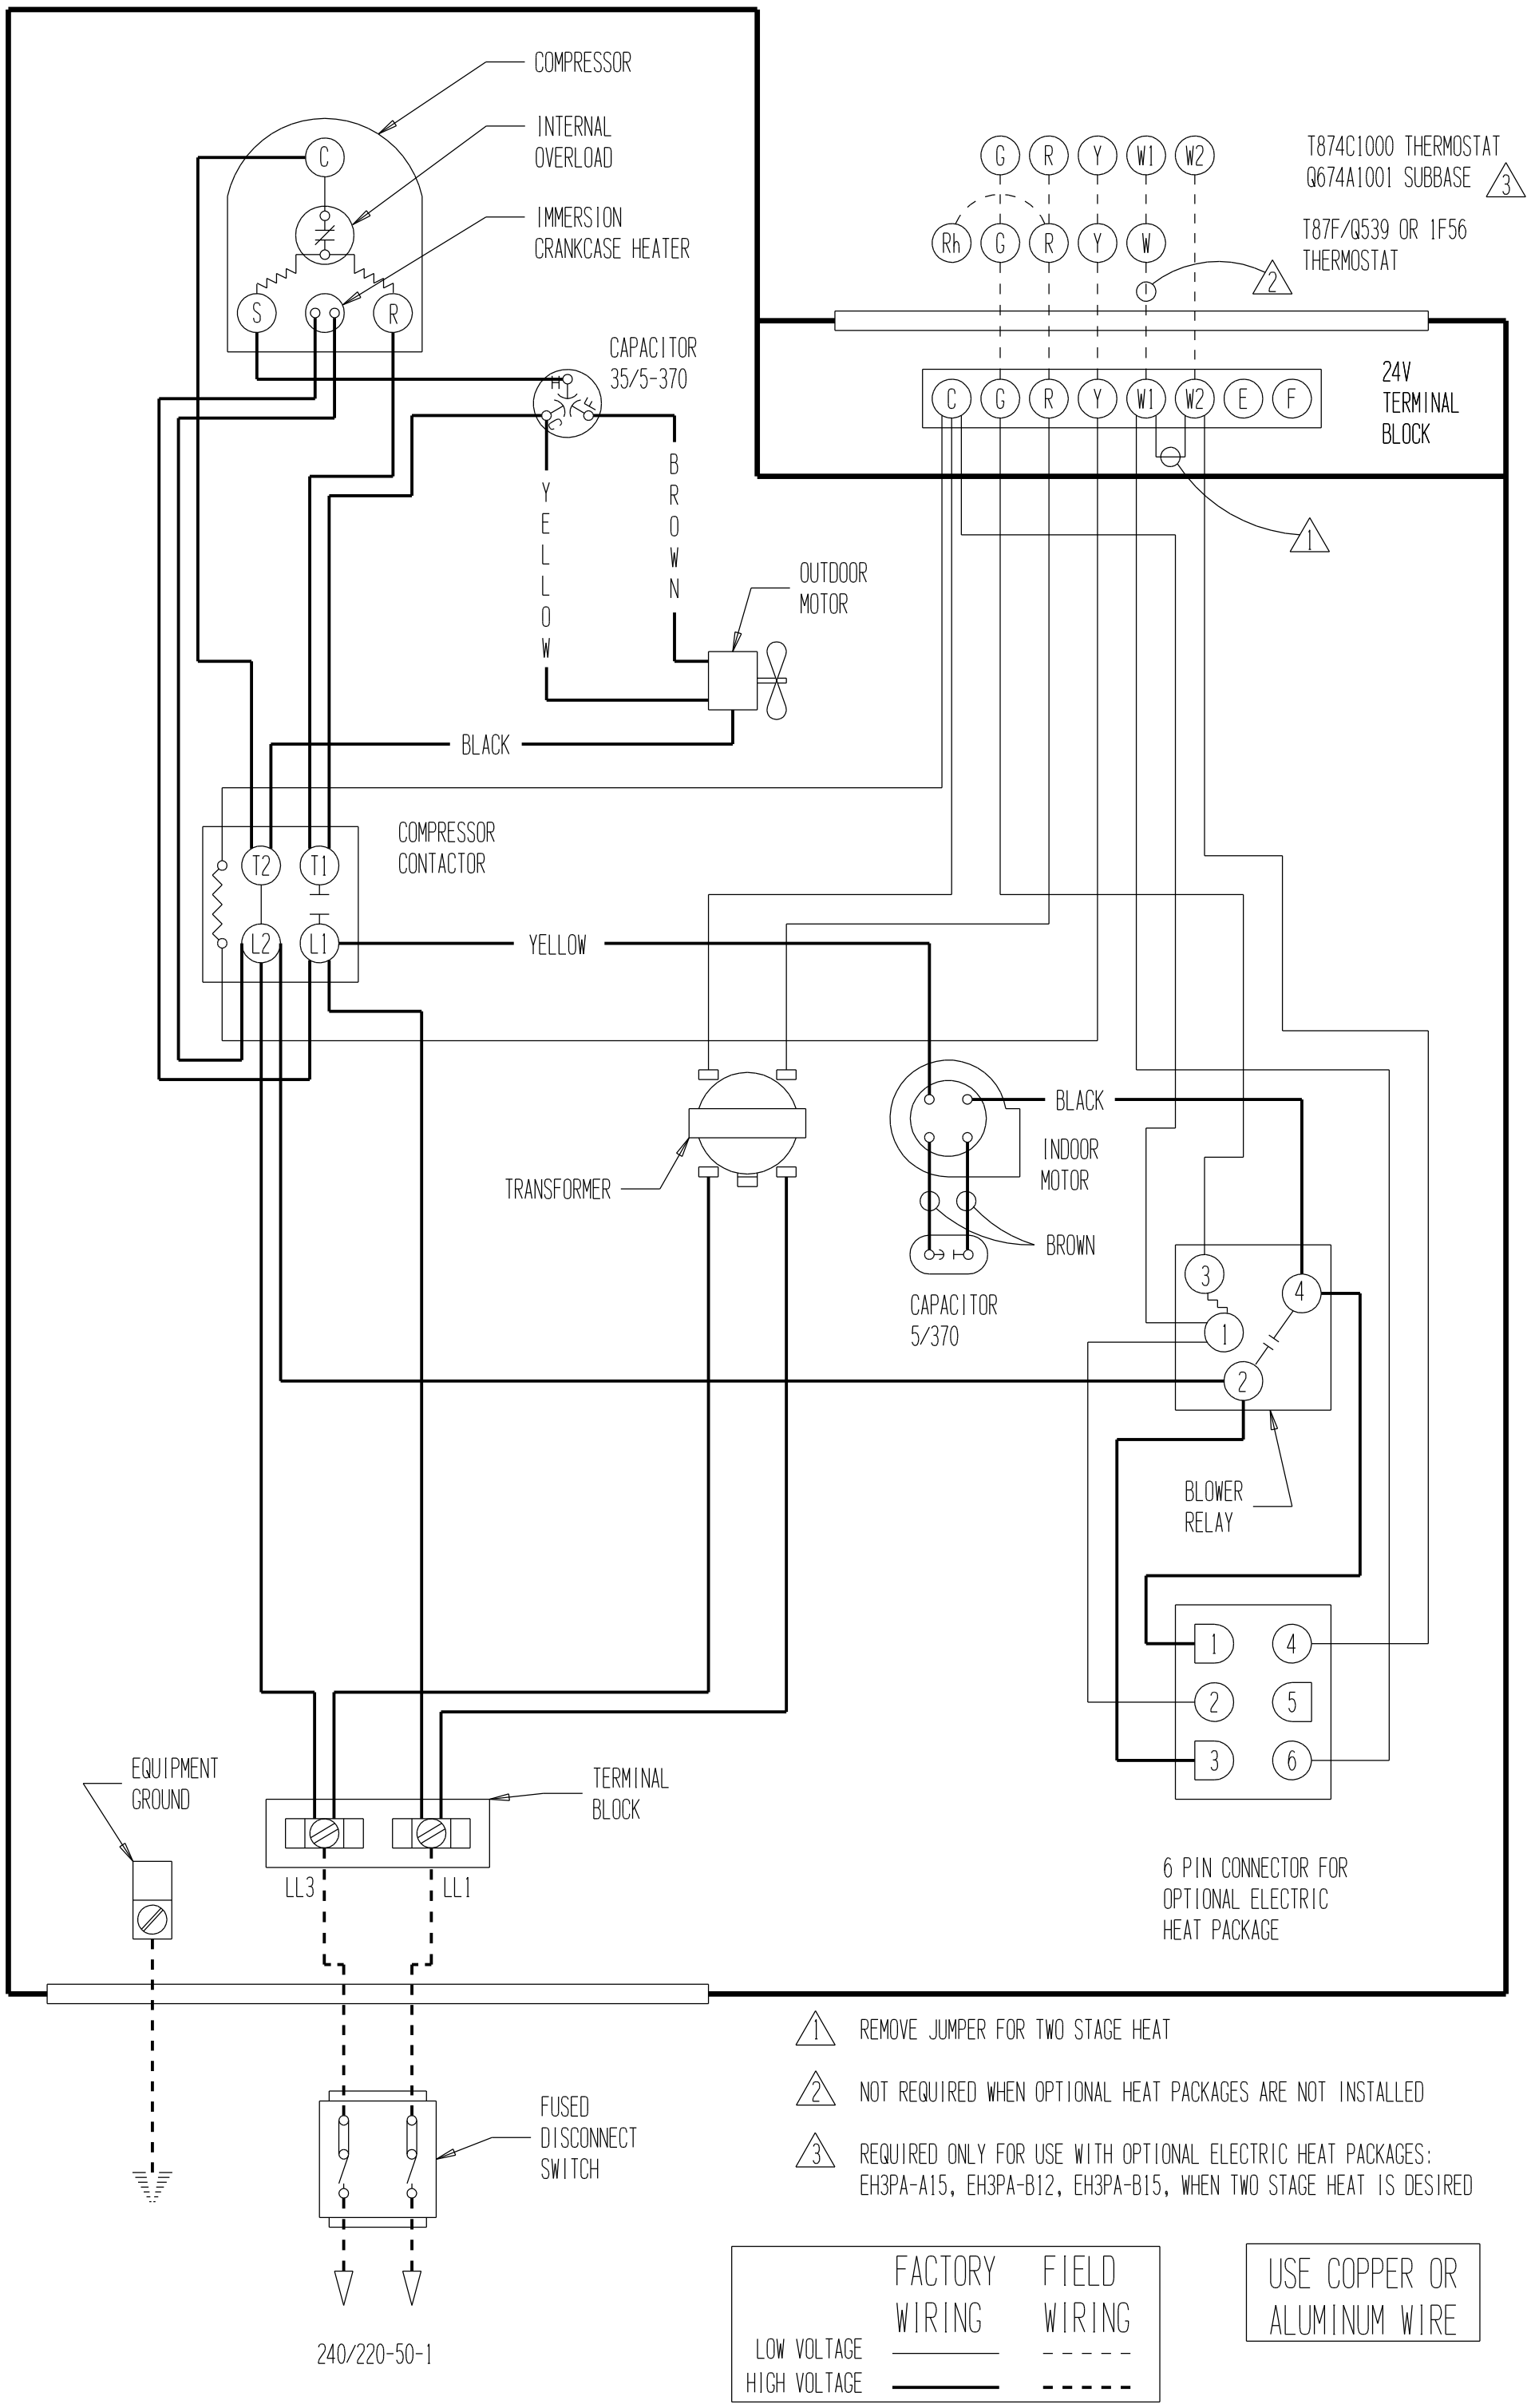
COMPRESSOR
INTERNAL OVERLOAD
IMMERSION CRANKCASE HEATER
C
S
R
CAPACITOR 35/5-370
H
C
FAN
YELLOW
BROWN
OUTDOOR MOTOR
BLACK
T874C1000 THERMOSTAT
Q674A1001 SUBBASE
3
T87F/Q539 OR 1F56 THERMOSTAT
G R Y W1 W2
Rh G R Y W
2
24V TERMINAL BLOCK
C G R Y W1 W2 E F
1
COMPRESSOR CONTACTOR
T2 T1
L2 L1
YELLOW
TRANSFORMER
BLACK
INDOOR MOTOR
BROWN
CAPACITOR 5/370
3 4 1 2
BLOWER RELAY
1 4 2 5 3 6
6 PIN CONNECTOR FOR OPTIONAL ELECTRIC HEAT PACKAGE
EQUIPMENT GROUND
TERMINAL BLOCK
LL3 LL1
FUSED DISCONNECT SWITCH
240/220-50-1
1 REMOVE JUMPER FOR TWO STAGE HEAT
2 NOT REQUIRED WHEN OPTIONAL HEAT PACKAGES ARE NOT INSTALLED
3 REQUIRED ONLY FOR USE WITH OPTIONAL ELECTRIC HEAT PACKAGES: EH3PA-A15, EH3PA-B12, EH3PA-B15, WHEN TWO STAGE HEAT IS DESIRED
FACTORY WIRING
FIELD WIRING
LOW VOLTAGE
HIGH VOLTAGE
USE COPPER OR ALUMINUM WIRE
4063-415