


230/208-60-1
240/220-50-1
PER NAMEPLATE

USE COPPER CONDUCTORS ONLY
SUITABLE FOR AT LEAST 75° C

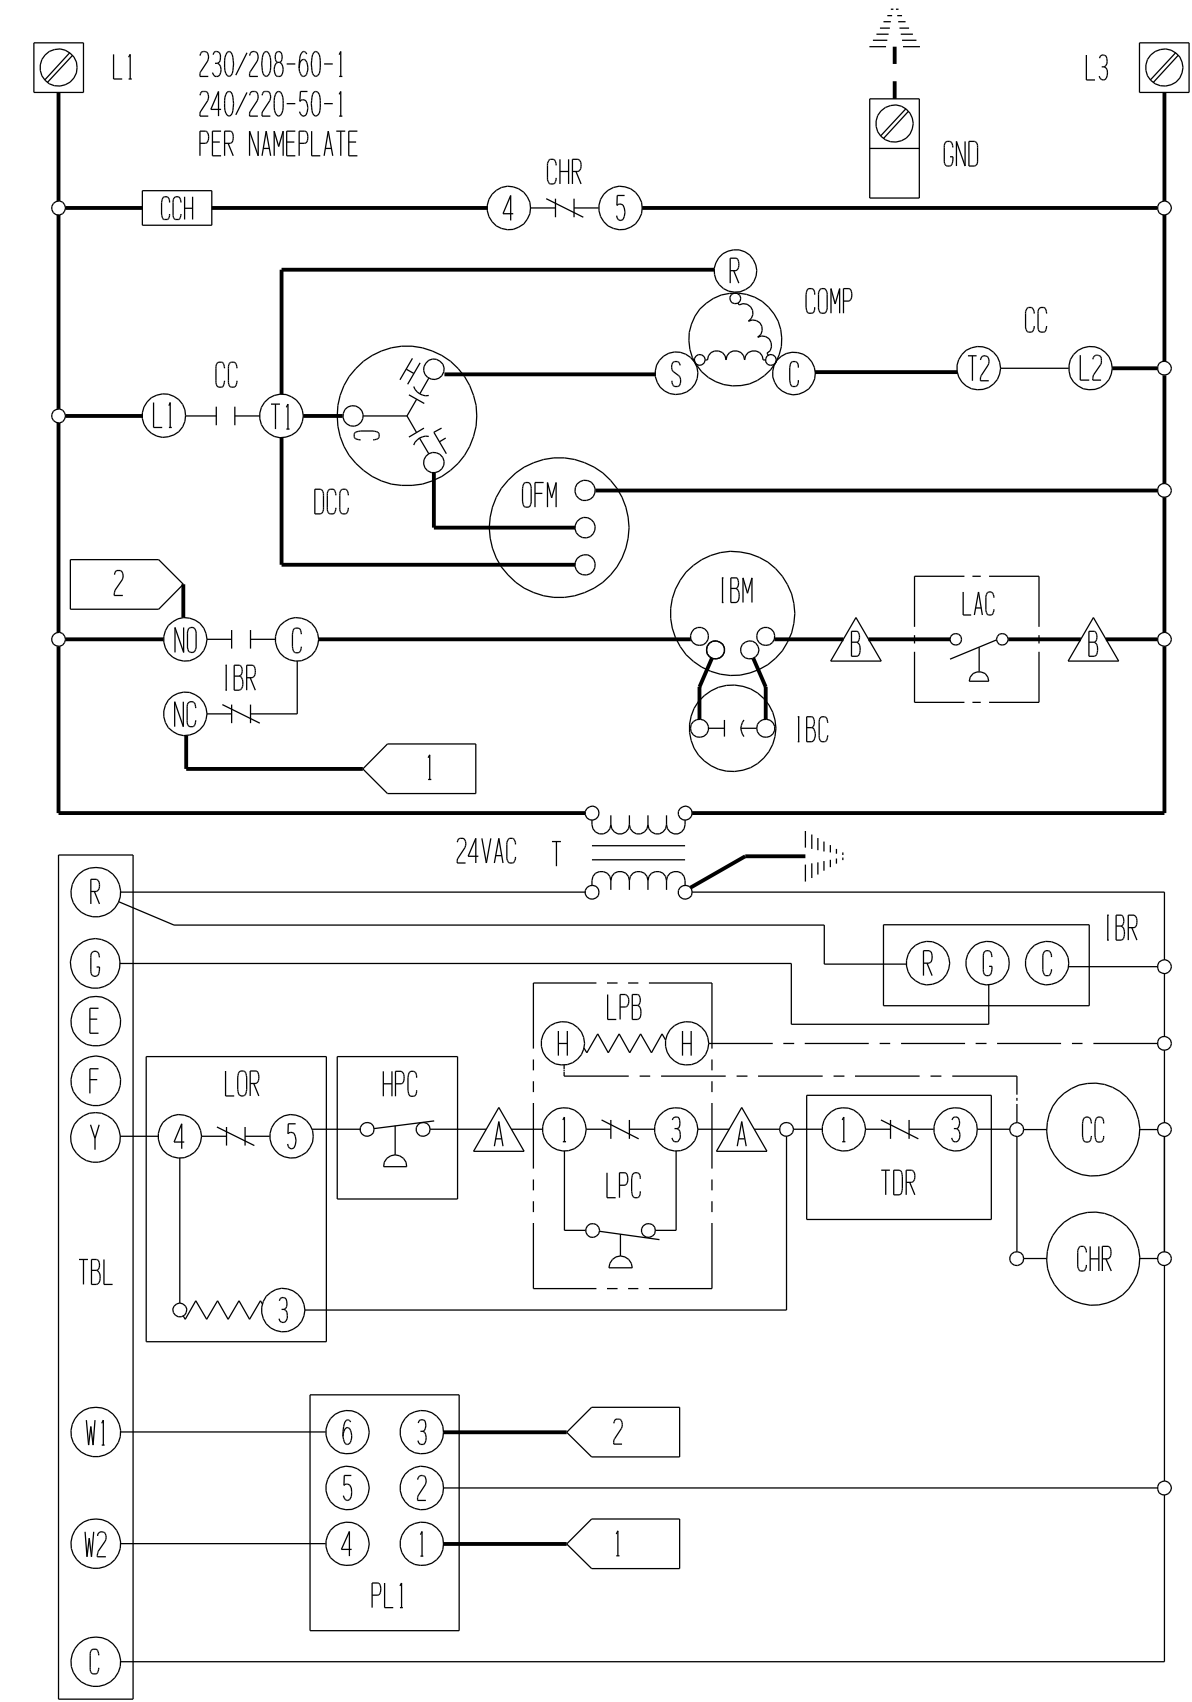

COMPONENT CODE			
CC	COMPRESSOR CONTACTOR	LDR	LOCK OUT RELAY
CCH	CRANKCASE HEATER	LPB	LOW PRESSURE BYPASS RELAY
CHR	CRANKCASE HEATER RELAY	LPC	LOW PRESSURE CONTROL
COMP	COMPRESSOR	OFC	OUTDOOR FAN CAPACITOR
DCC	DUAL CAN CAPACITOR	OFM	OUTDOOR FAN MOTOR
GND	EQUIPMENT GROUND	PL1	PLUG #1
HPC	HIGH PRESSURE CONTROL	T	TRANSFORMER
IBC	INDOOR BLOWER CAPACITOR	TB	TERMINAL BLOCK
IBM	INDOOR BLOWER MOTOR	TBL	LOW VOLTAGE TERMINAL BLOCK
IBR	INDOOR BLOWER RELAY	TDR	TIME DELAY RELAY
LAC	LOW AMBIENT CONTROL		

MODEL	CAPACITOR	PART NO.
P1048A1	60/10 370	8552-059
P1060A1	80/10 370	8552-058

A, **B** LABELED WIRES CONNECT IF NO OPTIONS USED. **C** MOVE RED WIRE TO 208V TAP FOR 208V OPERATION **D** RED WIRE FOR 50 HZ. OPERATION ONLY

	FACTORY STD.	FIELD	OPTIONAL
HIGH VOLTAGE	————	-----	-----
LOW VOLTAGE	————	-----	-----
ACCESSORY	————	-----	-----

COLOR CODE						
BK	BLACK	Y	YELLOW	V	VIOLET	T
BR	BROWN	G	GREEN	(PR)	PURPLE	PK
R	RED	BL	BLUE	GY	GRAY	L
O	ORANGE	W	WHITE	(S)	SLATE	

BARD MFG. CO.
4064-117 A