

COMPONENT CODE


CB	CIRCUIT BREAKER
COMP	COMPRESSOR
CC	COMPRESSOR CONTACTOR
CCH	CRANKCASE HEATER
CCM	COMP. CONTROL MODULE
FCB	FURNACE CONTROL BOARD
FR	FLAME ROLLOUT
FS	FLAME SENSOR
GND	GROUND
GV	GAS VALVE
HPC	HIGH PRESSURE CONTROL
IBC	INDOOR BLOWER CAPACITOR
IBM	INDOOR BLOWER MOTOR
IDB	INDUCED DRAFT BLOWER
LAC	LOW AMBIENT CONTROL
LPC	LOW PRESSURE CONTROL
DFC	OUTDOOR FAN CAPACITOR
DFM	OUTDOOR FAN MOTOR
PL1	2 PIN PLUG
PM	PHASE MONITOR
PRL	PRIMARY LIMIT
PS	PRESSURE SWITCH
SI	SPARK IGNITER
SL	SECONDARY LIMIT
T	TRANSFORMER
TB	TERMINAL BLOCK
TS	TERMINAL STRIP

USE COPPER
CONDUCTORS SUITABLE
FOR AT LEAST 75°C

BLOWER SPEED COLOR CODE	
HIGH	BLACK
MEDIUM HIGH	BLUE
MEDIUM LOW	PURPLE
LOW	RED
AUX.	ORANGE

COLOR CODE

BK	BLACK
BL	BLUE
BR	BROWN
GR	GRAY
O	ORANGE
PR	PURPLE
R	RED
W	WHITE
Y	YELLOW

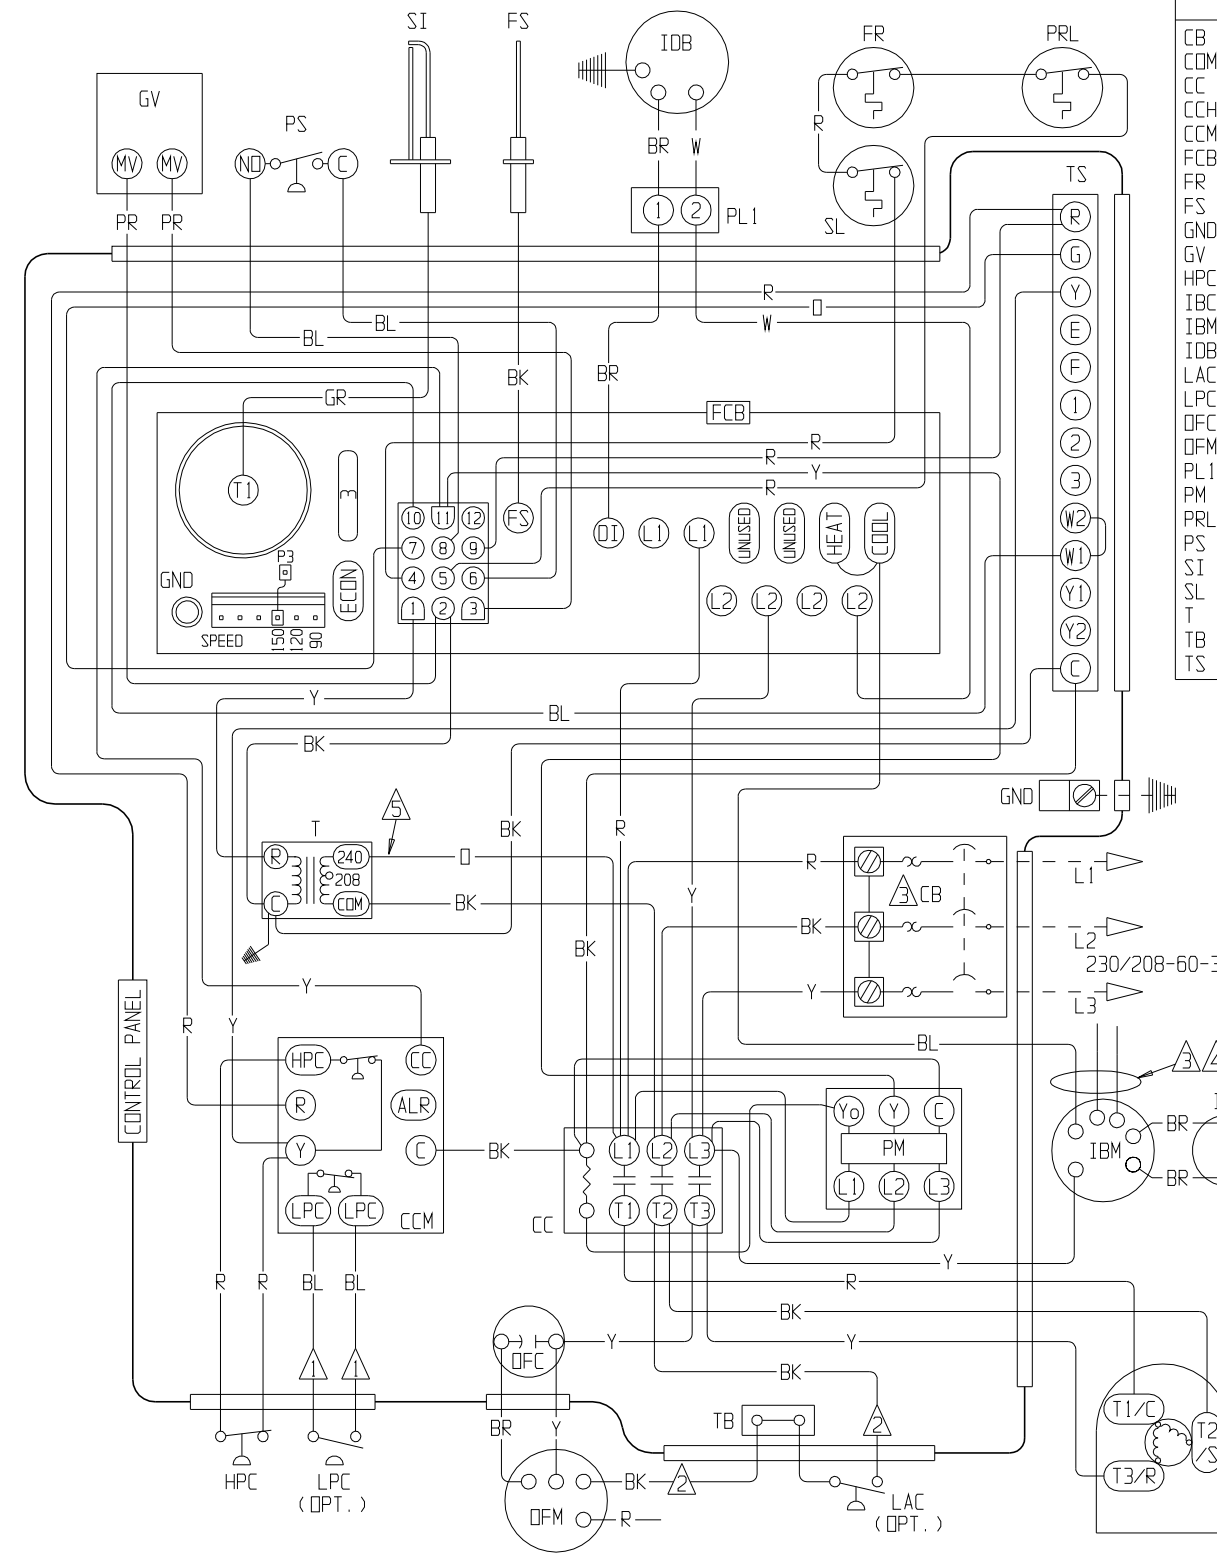

⚠ LABELED WIRES CONNECT
IF NO OPTIONS USED

MODEL	COOL	HEAT	C. BREAKER
WG423	MED.	MED.	35 A

⚠ FOR 208V OPER. USE 208V TAP

IF ANY OF THE ORIGINAL WIRE AS SUPPLIED WITH THE APPLIANCE MUST BE REPLACED, IT MUST BE REPLACED WITH WIRING MATERIAL HAVING A TEMPERATURE RATING OF AT LEAST 105°C EXCEPT THE IGNITION CABLE WHICH IS 250° HIGH VOLTAGE CABLE.

⚠ RED (LOW), PURPLE (MED. LOW)
BLUE (MED. HIGH), BLACK (HIGH)
WHERE APPLICABLE.
ALL UNUSED LEADS TAPED OFF.

WIRING CODE	
460 VAC	FACTORY _____
460 VAC	FIELD - - - - -
24 VAC	FACTORY _____
24 VAC	FIELD - - - - -

⚠ DANGER
* ELECTRIC SHOCK HAZARD
* DISCONNECT POWER BEFORE
SERVICING