


For Vent Wiring or controller/thermostat connections,
see literature packet or go to www.bardhvac.com

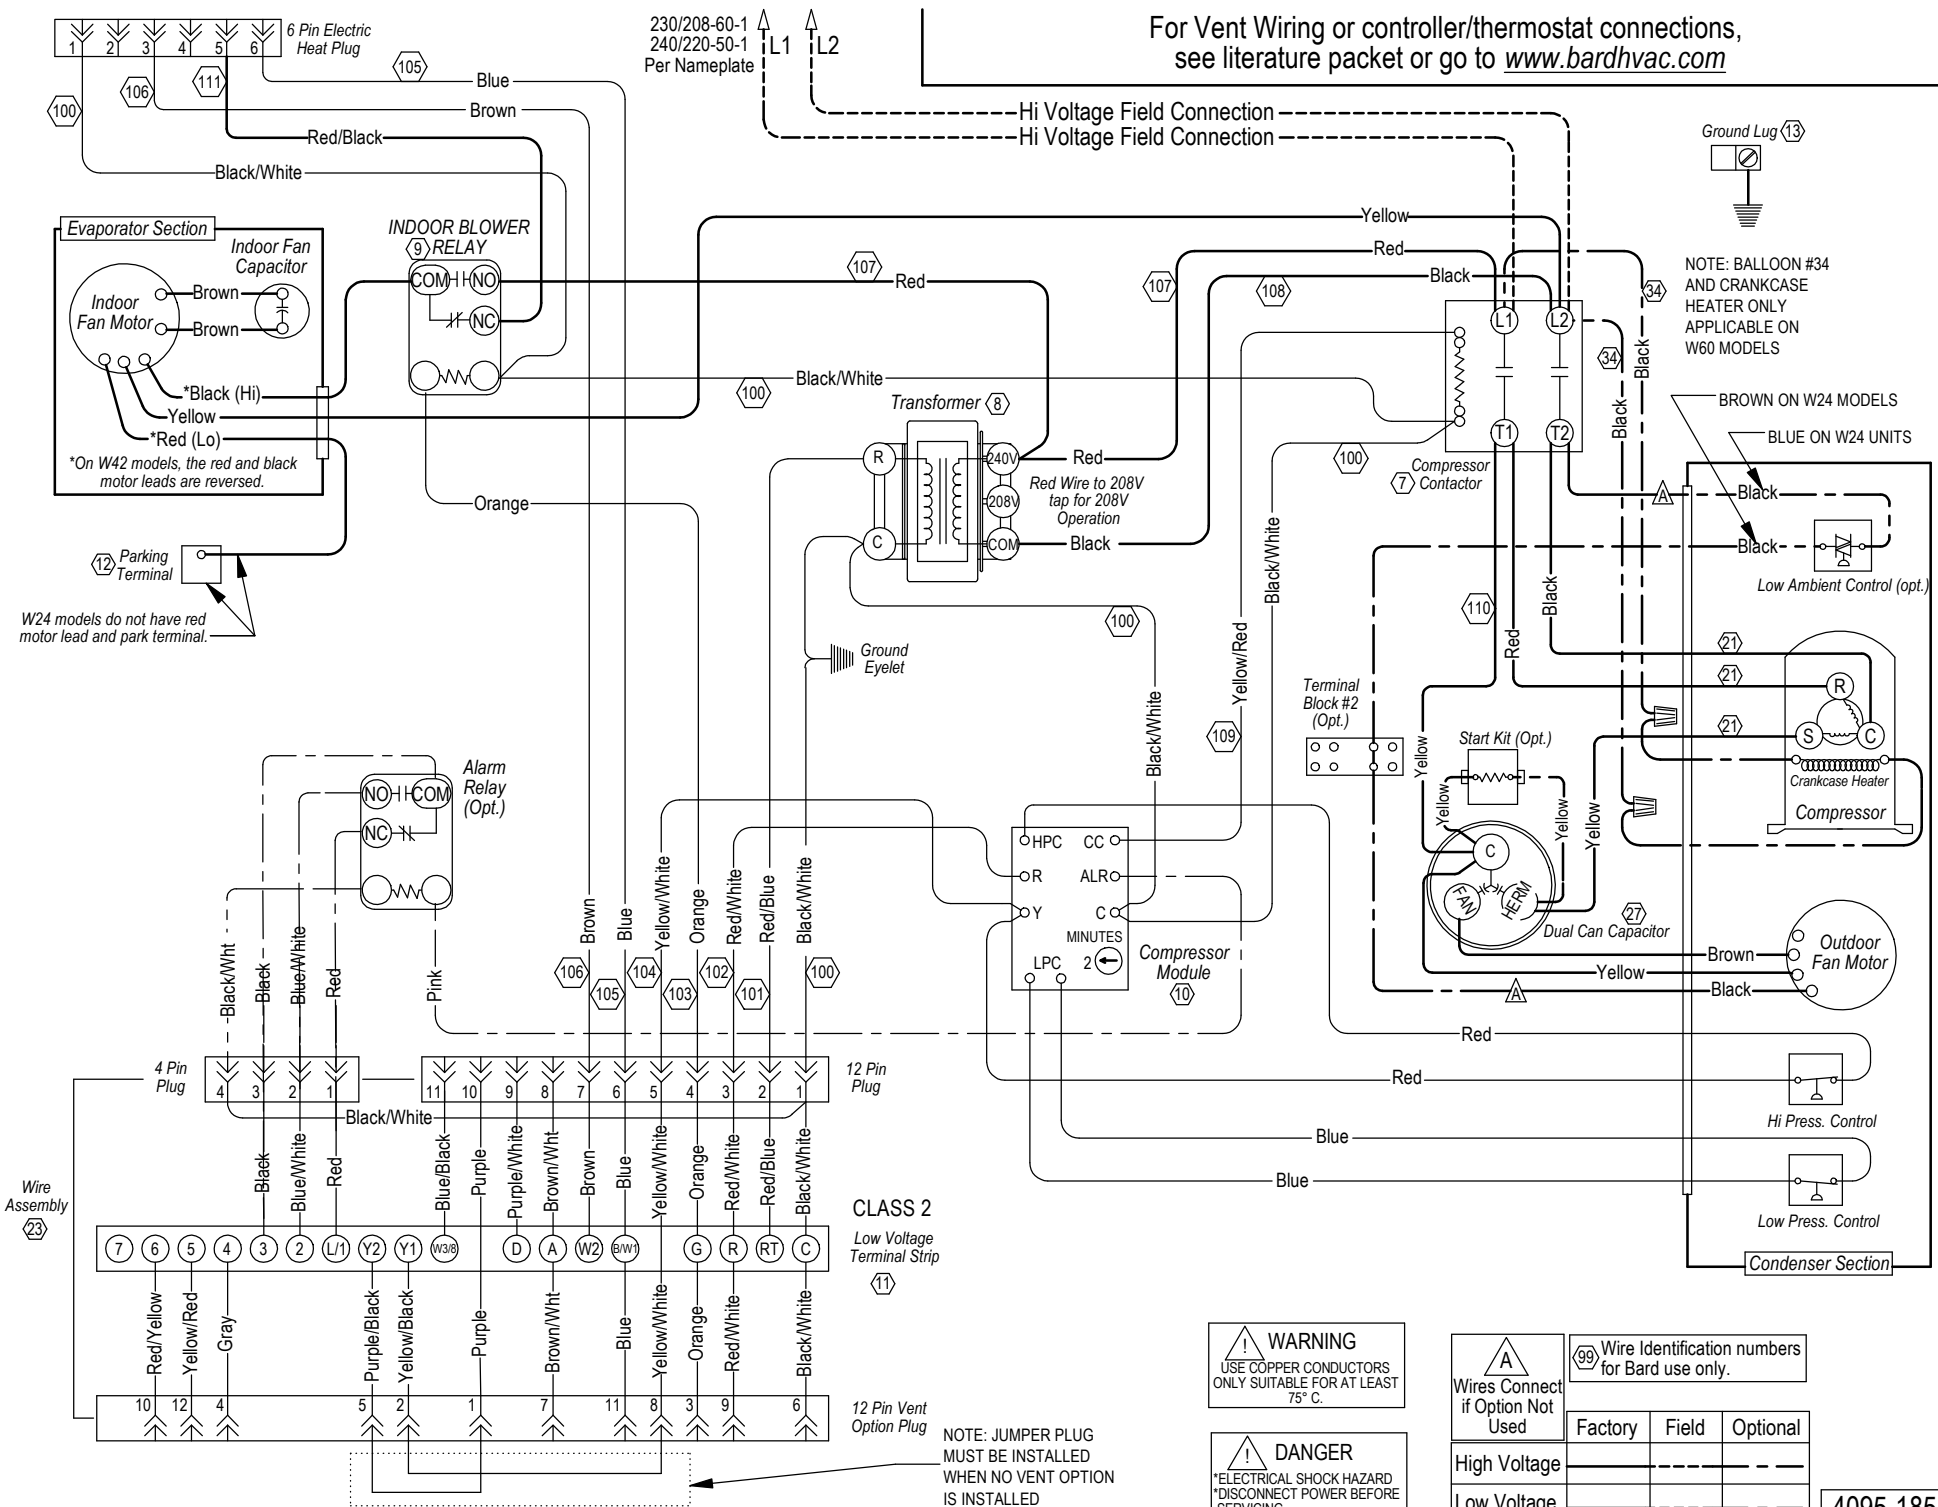

230/208-60-1
240/220-50-1
Per Nameplate

NOTE: BALLOON #34
AND CRANKCASE
HEATER ONLY
APPLICABLE ON
W60 MODELS

BROWN ON W24 MODELS
BLUE ON W24 UNITS

W24 models do not have red motor lead and park terminal.

CLASS 2
Low Voltage
Terminal Strip
(11)

NOTE: JUMPER PLUG
MUST BE INSTALLED
WHEN NO VENT OPTION
IS INSTALLED

WARNING
USE COPPER CONDUCTORS
ONLY SUITABLE FOR AT LEAST
75° C.

DANGER
ELECTRICAL SHOCK HAZARD
DISCONNECT POWER BEFORE
SERVICING.

Wires Connect if Option Not Used	99 Wire Identification numbers for Bard use only.		
	Factory	Field	Optional
High Voltage			
Low Voltage			

4095-185 B