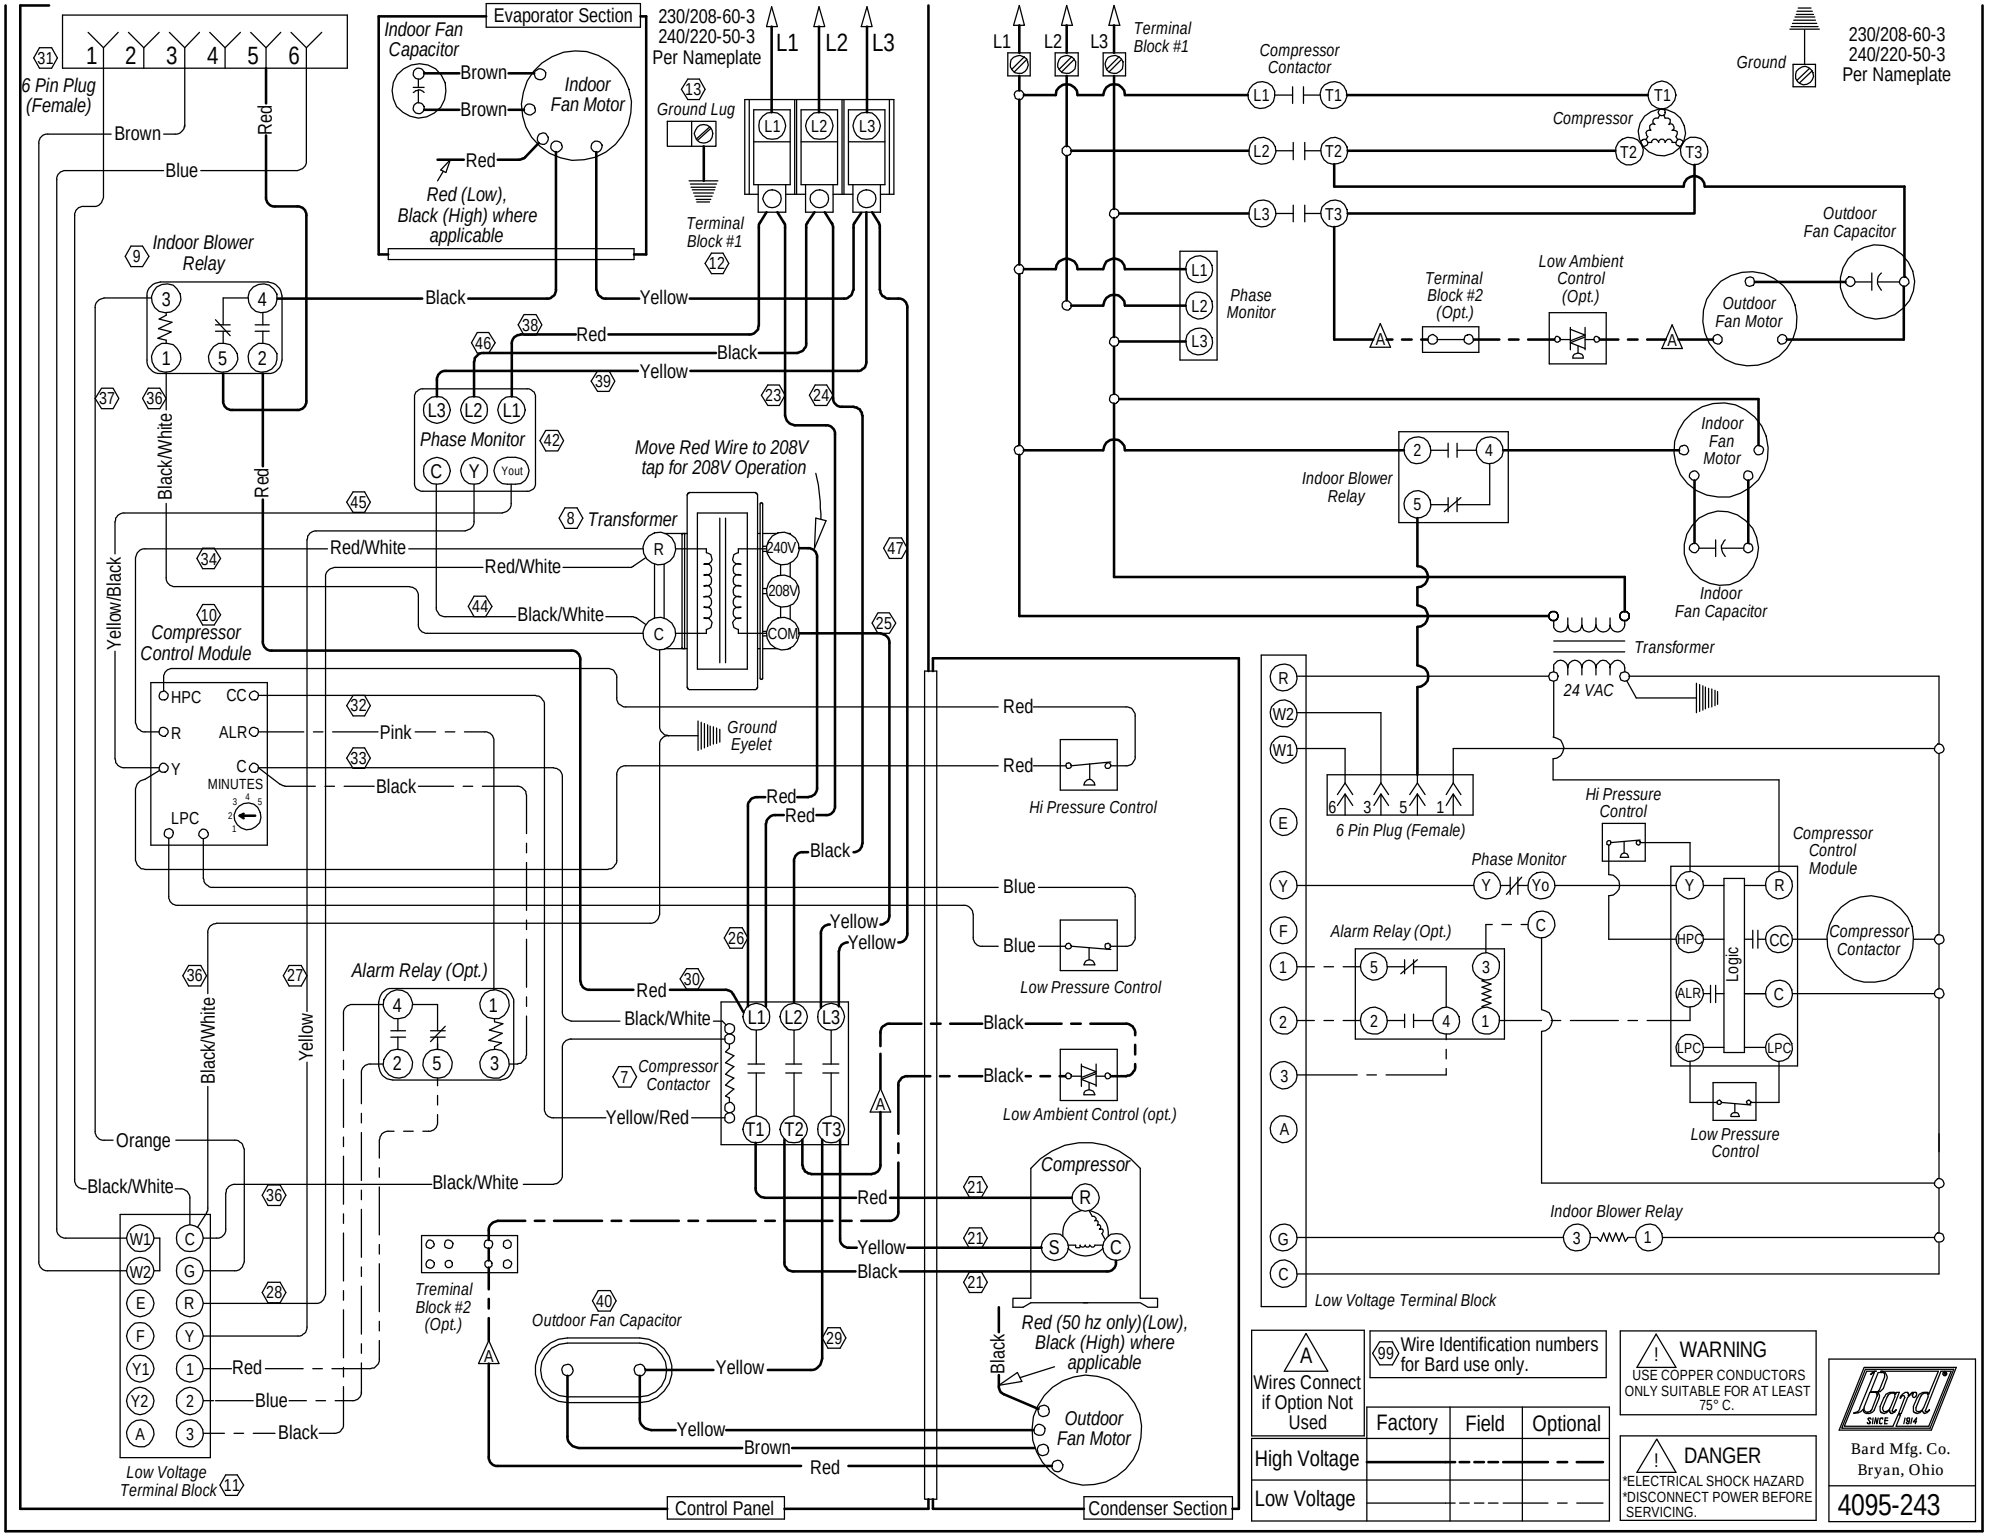
Evaporator Section
Control Panel
Condenser Section
6 Pin Plug (Female)
Indoor Fan Capacitor
Indoor Fan Motor
Red (Low), Black (High) where applicable
230/208-60-3
240/220-50-3
Per Nameplate
Ground Lug
Terminal Block #1
Indoor Blower Relay
Phase Monitor
Move Red Wire to 208V tap for 208V Operation
Transformer
Compressor Control Module
Ground Eyelet
Hi Pressure Control
Low Pressure Control
Low Ambient Control (opt.)
Alarm Relay (Opt.)
Compressor Contactor
Compressor
Treminal Block #2 (Opt.)
Outdoor Fan Capacitor
Outdoor Fan Motor
Red (50 hz only)(Low), Black (High) where applicable
Low Voltage Terminal Block
Compressor Contactor
Terminal Block #2 (Opt.)
Low Ambient Control (Opt.)
Ground
Indoor Fan Motor
Indoor Fan Capacitor
24 VAC
Hi Pressure Control
Compressor Control Module
Compressor Contactor
Low Pressure Control
Low Voltage Terminal Block
Wires Connect if Option Not Used
Wire Identification numbers for Bard use only.
Factory
Field
Optional
High Voltage
Low Voltage
WARNING
USE COPPER CONDUCTORS ONLY SUITABLE FOR AT LEAST 75° C.
DANGER
*ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE SERVICING.
Bard Mfg. Co.
Bryan, Ohio
4095-243