


USE COPPER CONDUCTORS
ONLY SUITABLE FOR AT
LEAST 75° C

COMPONENT CODE			
CC	COMPRESSOR CONTACTOR	LPB	LOW PRESSURE BYPASS
CCH	COMPRESSOR CRANKCASE HEATER	LPC	LOW PRESSURE CONTROL
COMP	COMPRESSOR	LS	LIMIT SWITCH
GND	EQUIPMENT GROUND	OFM	OUTDOOR FAN MOTOR
H1	HEAT STRIP #1	OFR	OUTDOOR FAN RELAY
H2	HEAT STRIP #2	PD	PULL DISCONNECT
HC1	HEATER CONTACTOR #1	PL1	PLUG #1
HC2	HEATER CONTACTOR #2	T	TRANSFORMER
HPC	HIGH PRESSURE CONTROL	TB	TERMINAL BLOCK
IBC	INDOOR BLOWER CAPACITOR	TBL	LOW VOLTAGE TERMINAL BLOCK
IBM	INDOOR BLOWER MOTOR	TCO	THERMAL CUTOFF
IBR	INDOOR BLOWER RELAY	TDR	TIME DELAY RELAY
LAC	LOW AMBIENT CONTROL		
LOR	LOCK OUT RELAY		

A, **B**, **E** LABELED WIRES CONNECT IF NO OPTIONS USED. **A** RED (LOW) BLACK (HIGH) **A** MOVE RED WIRE TO 208V TAP FOR 380V OPERATION

HIGH VOLTAGE LOW VOLTAGE ACCESSORY	FACTORY STD.	FIELD	OPTIONAL	COLOR CODE												
				BK	BR	R	O	Y	G	BL	W	V (PR)	GY (S)	T	PK	L
	————	-----	- - - - -	BLACK	BROWN	RED	ORANGE	YELLOW	GREEN	BLUE	WHITE	VIOLET (PR)	GRAY (S)	VIOLET PURPLE	TAN	TAN PINK LAVENDER

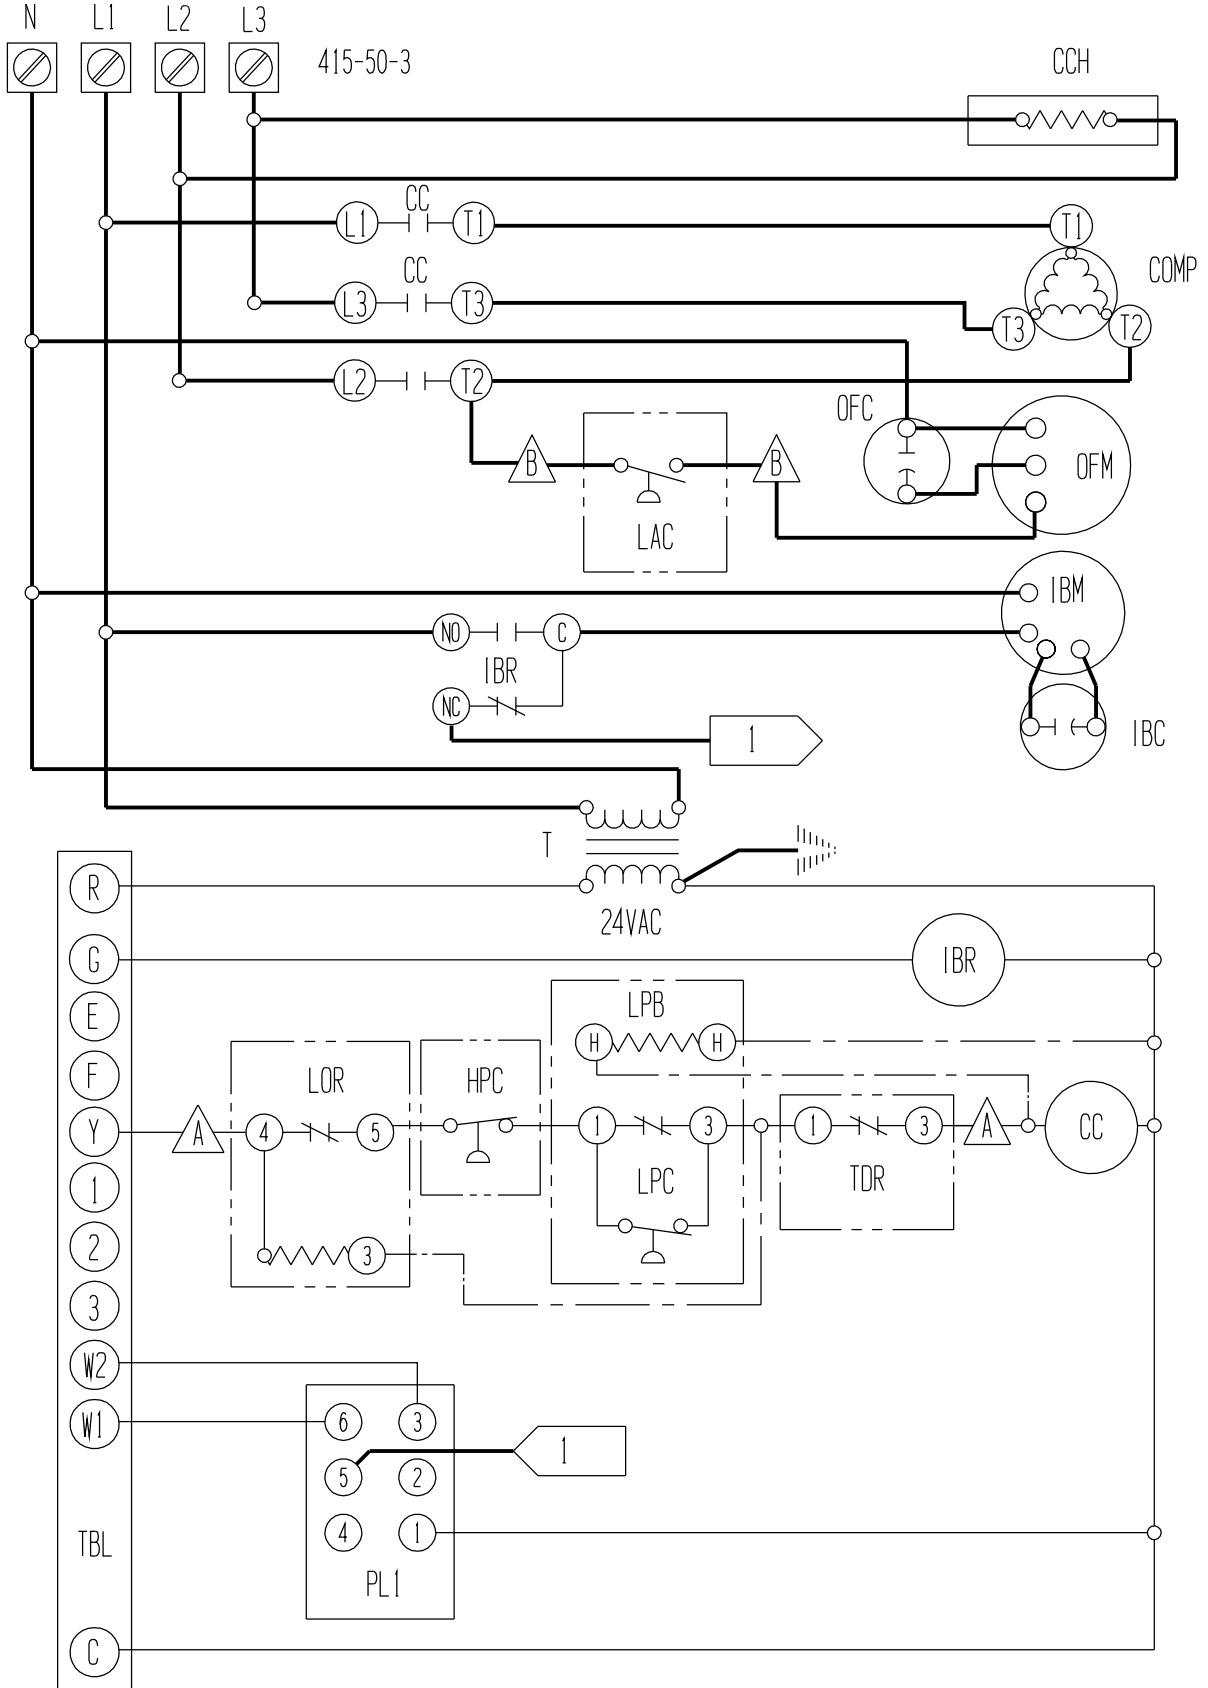

BARD MFG. CO.
4095-610 B