


USE COPPER CONDUCTORS
ONLY SUITABLE FOR
AT LEAST 75° C

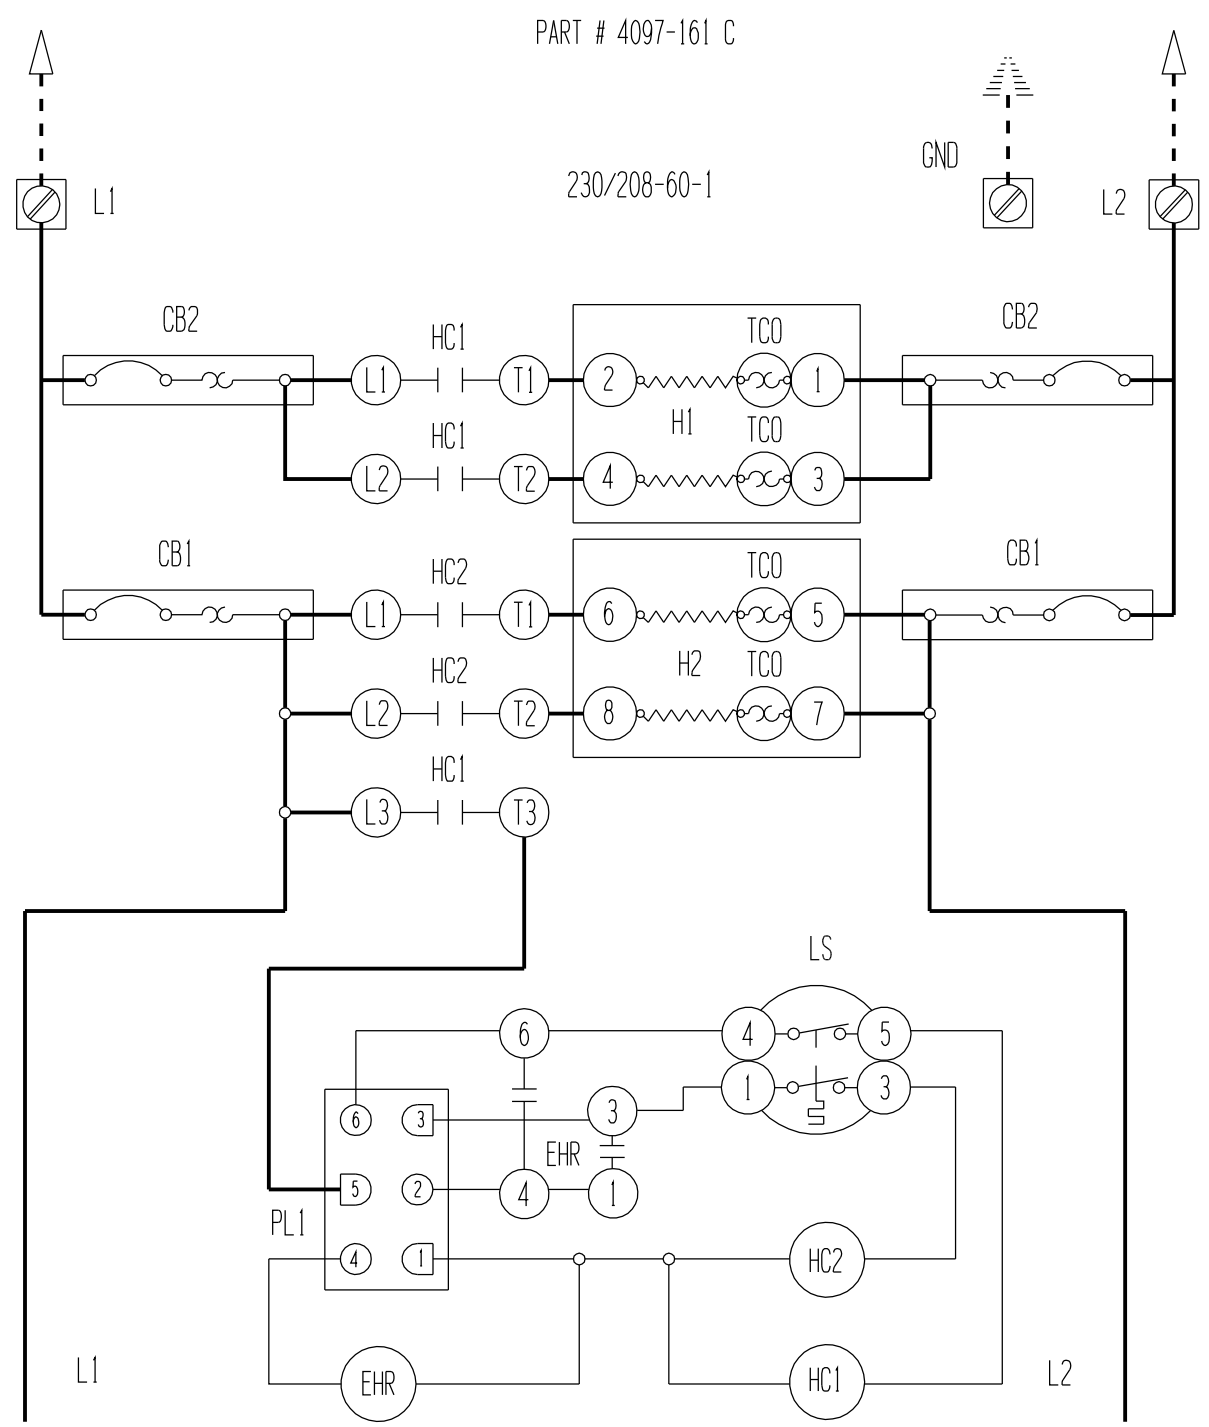

PART # 4097-161 C

230/208-60-1

230/208-60-1

L1

L2