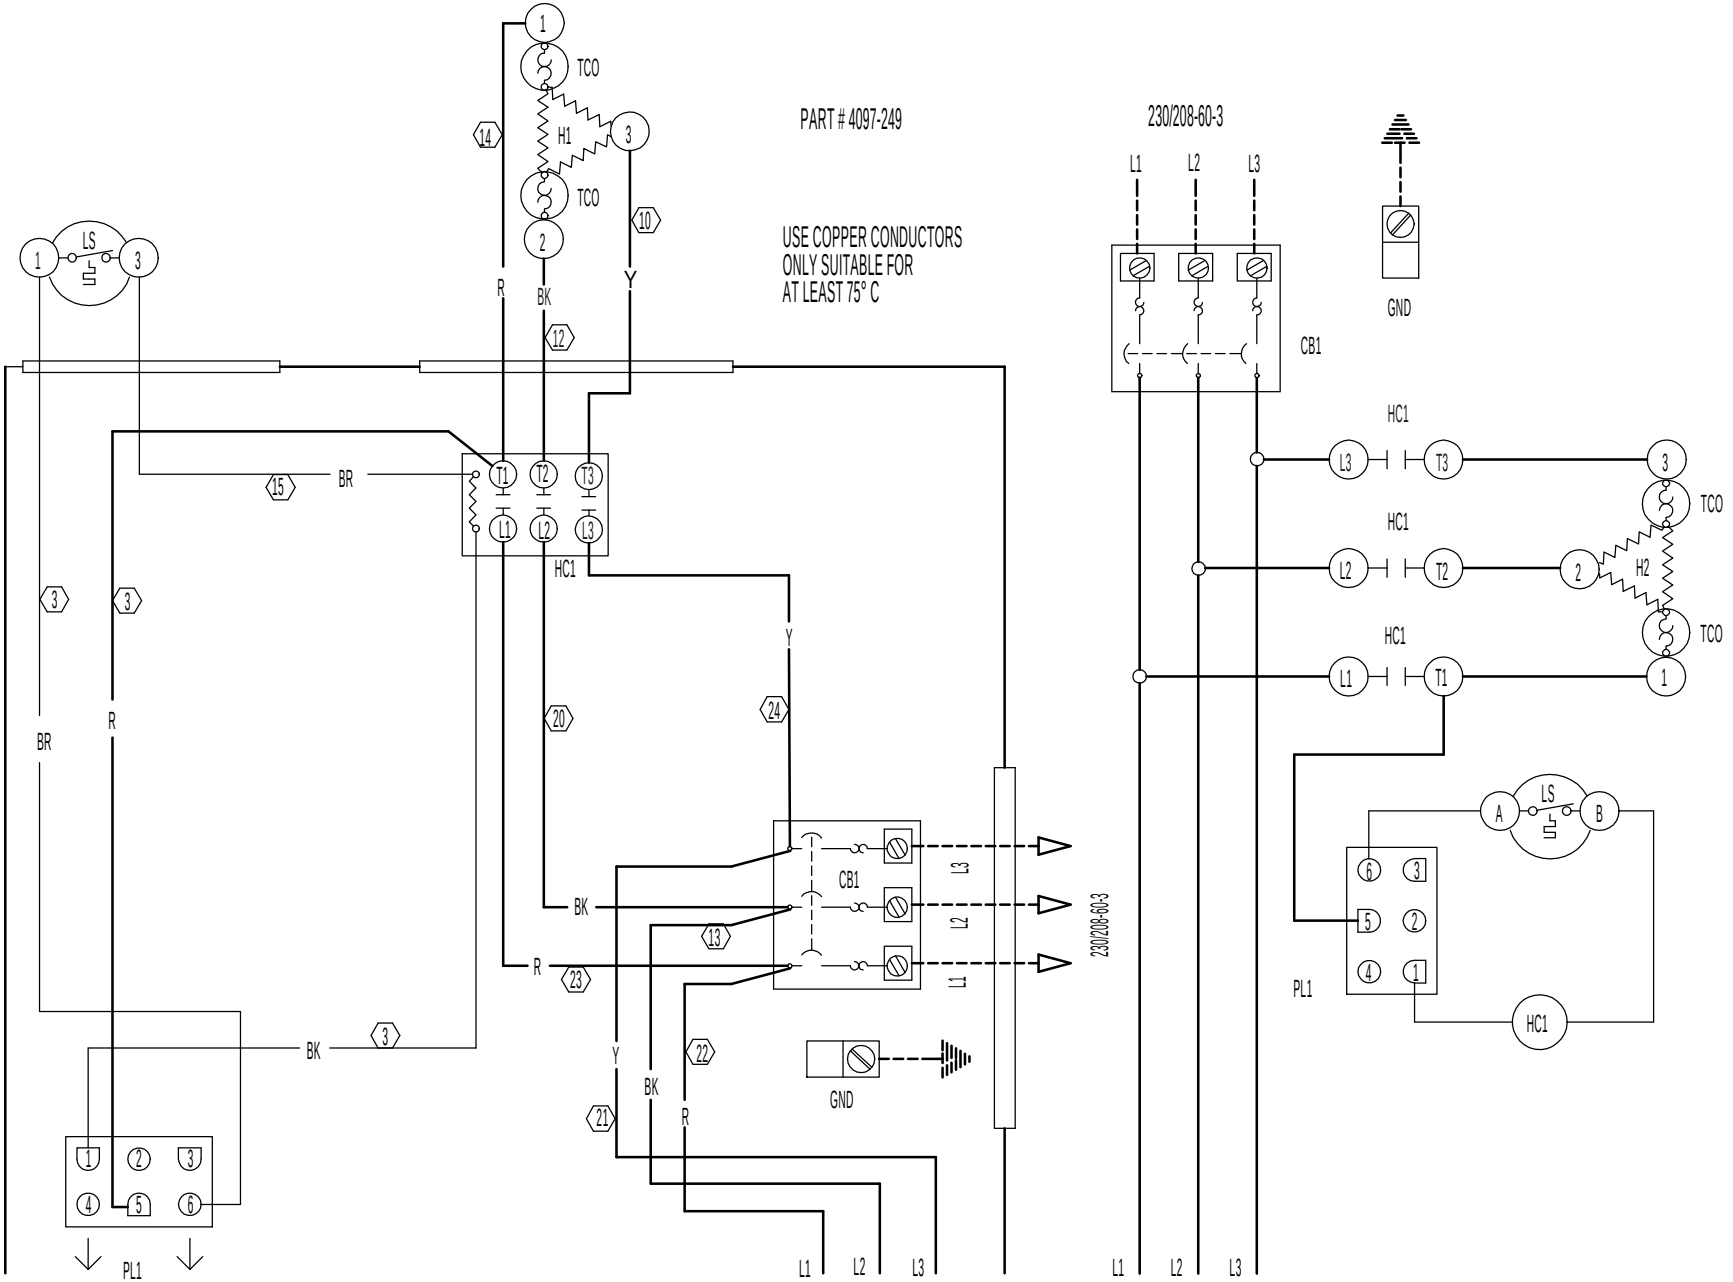
PART # 4097-249
USE COPPER CONDUCTORS
ONLY SUITABLE FOR
AT LEAST 75° C
230/208-60-3
TCO
H1
H2
LS
HC1
CB1
GND
PL1
BR
R
BK
Y
L1
L2
L3
T1
T2
T3
A
B