


USE COPPER CONDUCTORS ONLY
SUITABLE FOR AT LEAST 75° C

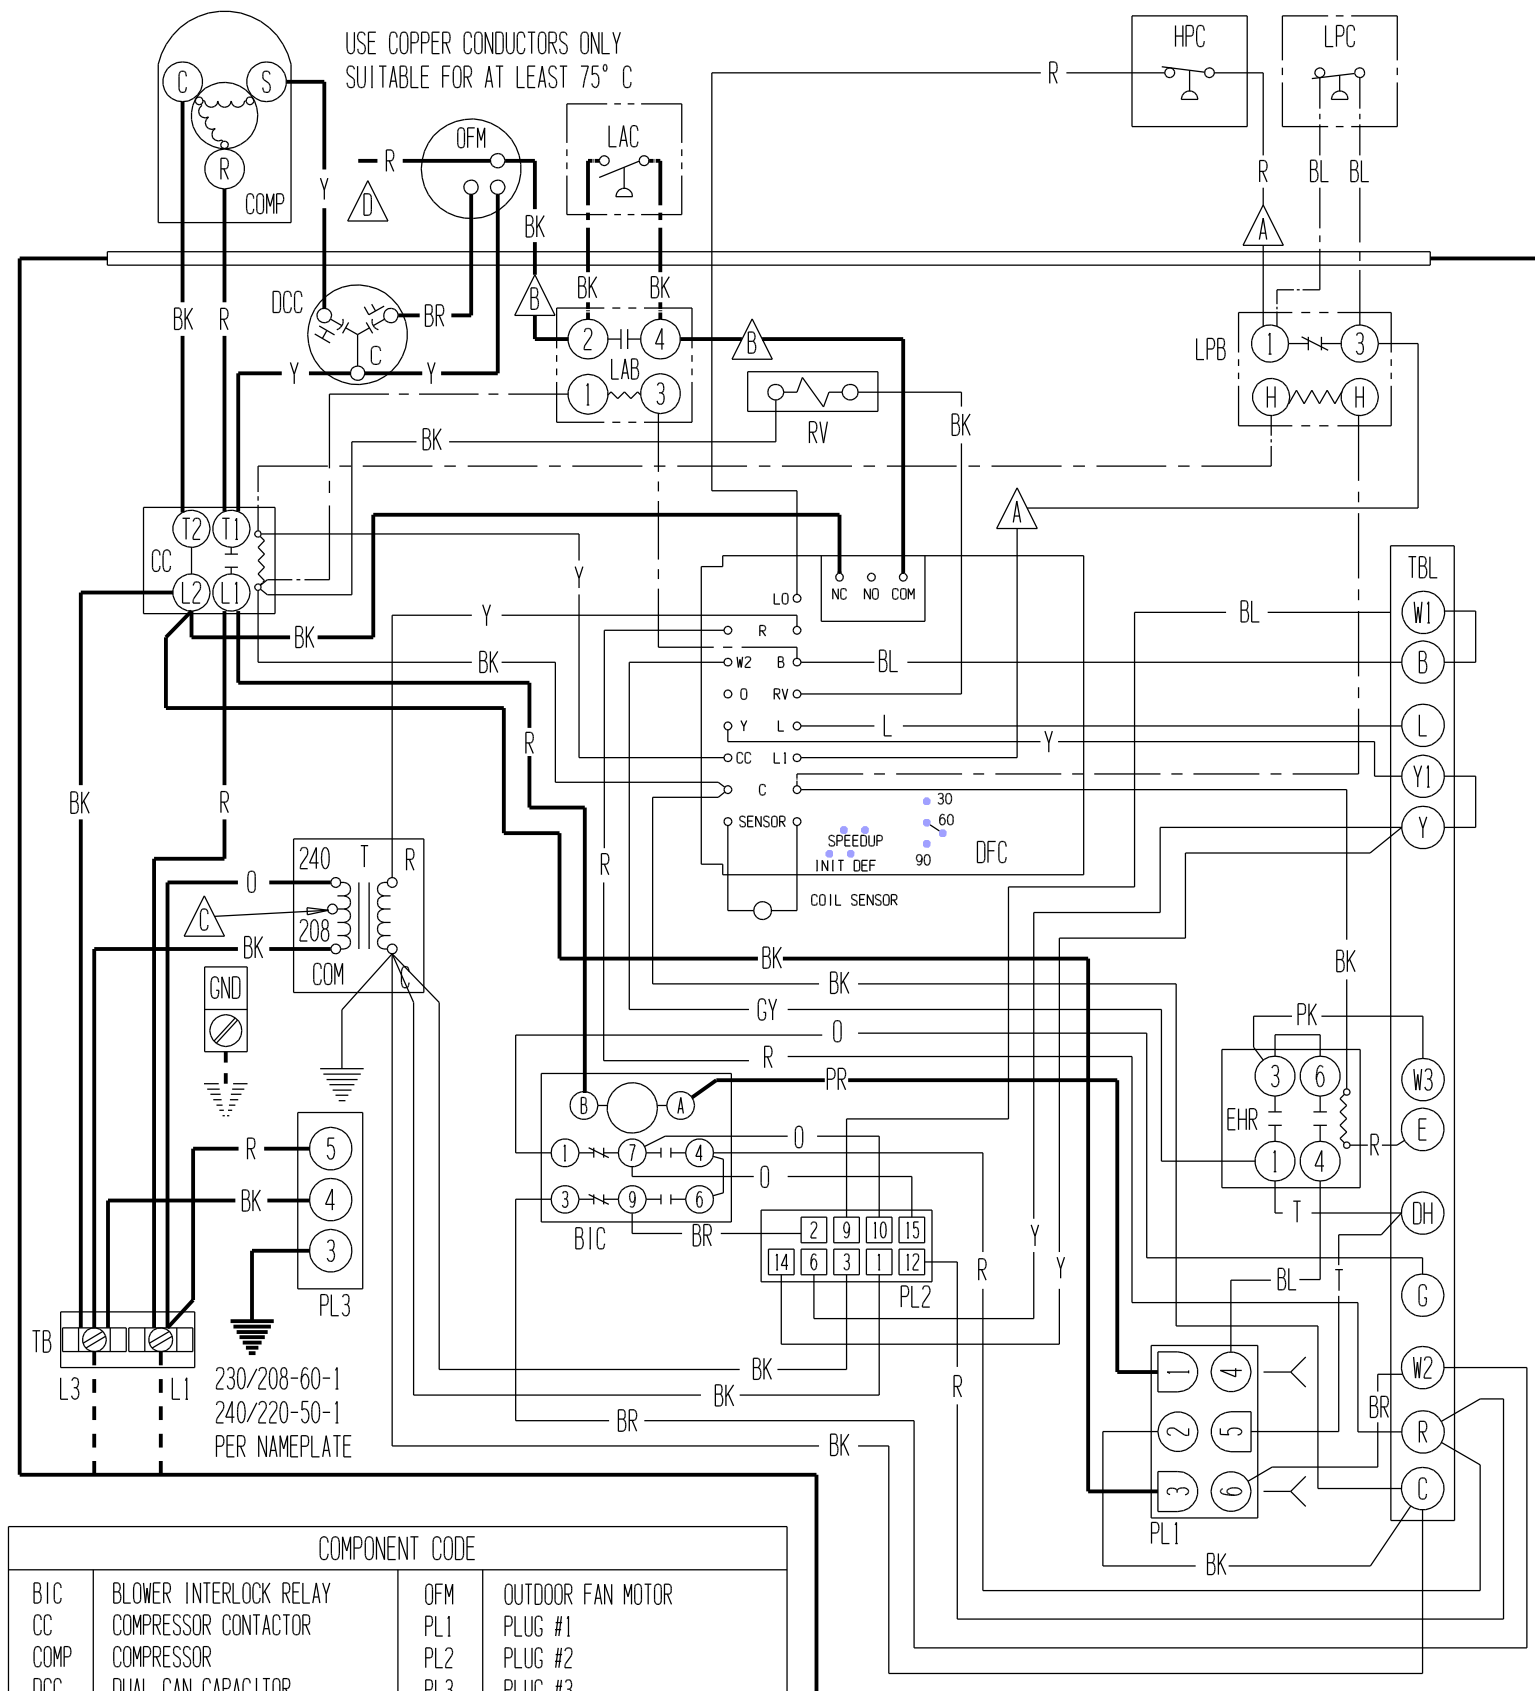

230/208-60-1
240/220-50-1
PER NAMEPLATE

COMPONENT CODE

BIC	BLOWER INTERLOCK RELAY	OFM	OUTDOOR FAN MOTOR
CC	COMPRESSOR CONTACTOR	PL1	PLUG #1
COMP	COMPRESSOR	PL2	PLUG #2
DCC	DUAL CAN CAPACITOR	PL3	PLUG #3
DFC	DEFROST CONTROL	RV	REV. VALVE SOLENOID
EHR	EMERGENCY HEAT RELAY	T	TRANSFORMER
GND	EQUIPMENT GROUND	TB	TERMINAL BLOCK
HPC	HIGH PRESSURE CONTROL	TBL	LOW VOLTAGE TERMINAL BLOCK
LAB	LOW AMBIENT BYPASS CONTROL		
LAC	LOW AMBIENT CONTROL		
LPB	LOW PRESSURE BYPASS		
LPC	LOW PRESSURE CONTROL		

A , B LABELED WIRES CONNECT IF NO OPTIONS USED.
 A MOVE ORANGE WIRE TO 208V TAP FOR 208V OPERATION
 A BLACK (HIGH), RED (LOW) WHERE APPLICABLE

FACTORY STD.			FIELD			OPTIONAL		
HIGH VOLTAGE	—————	—————	-----	-----	-----	-----	-----	-----
LOW VOLTAGE	—————	—————	-----	-----	-----	-----	-----	-----
ACCESSORY	—————	—————	-----	-----	-----	-----	-----	-----

COLOR CODE					
BK	BLACK	Y	YELLOW	V	VIOLET
BR	BROWN	G	GREEN	(PR)	PURPLE
R	RED	BL	BLUE	GY	GRAY
O	ORANGE	W	WHITE	(S)	SLATE
		T	TAN	PK	PINK
		L	LAVENDER		

BARD MFG. CO.
4098-125

