
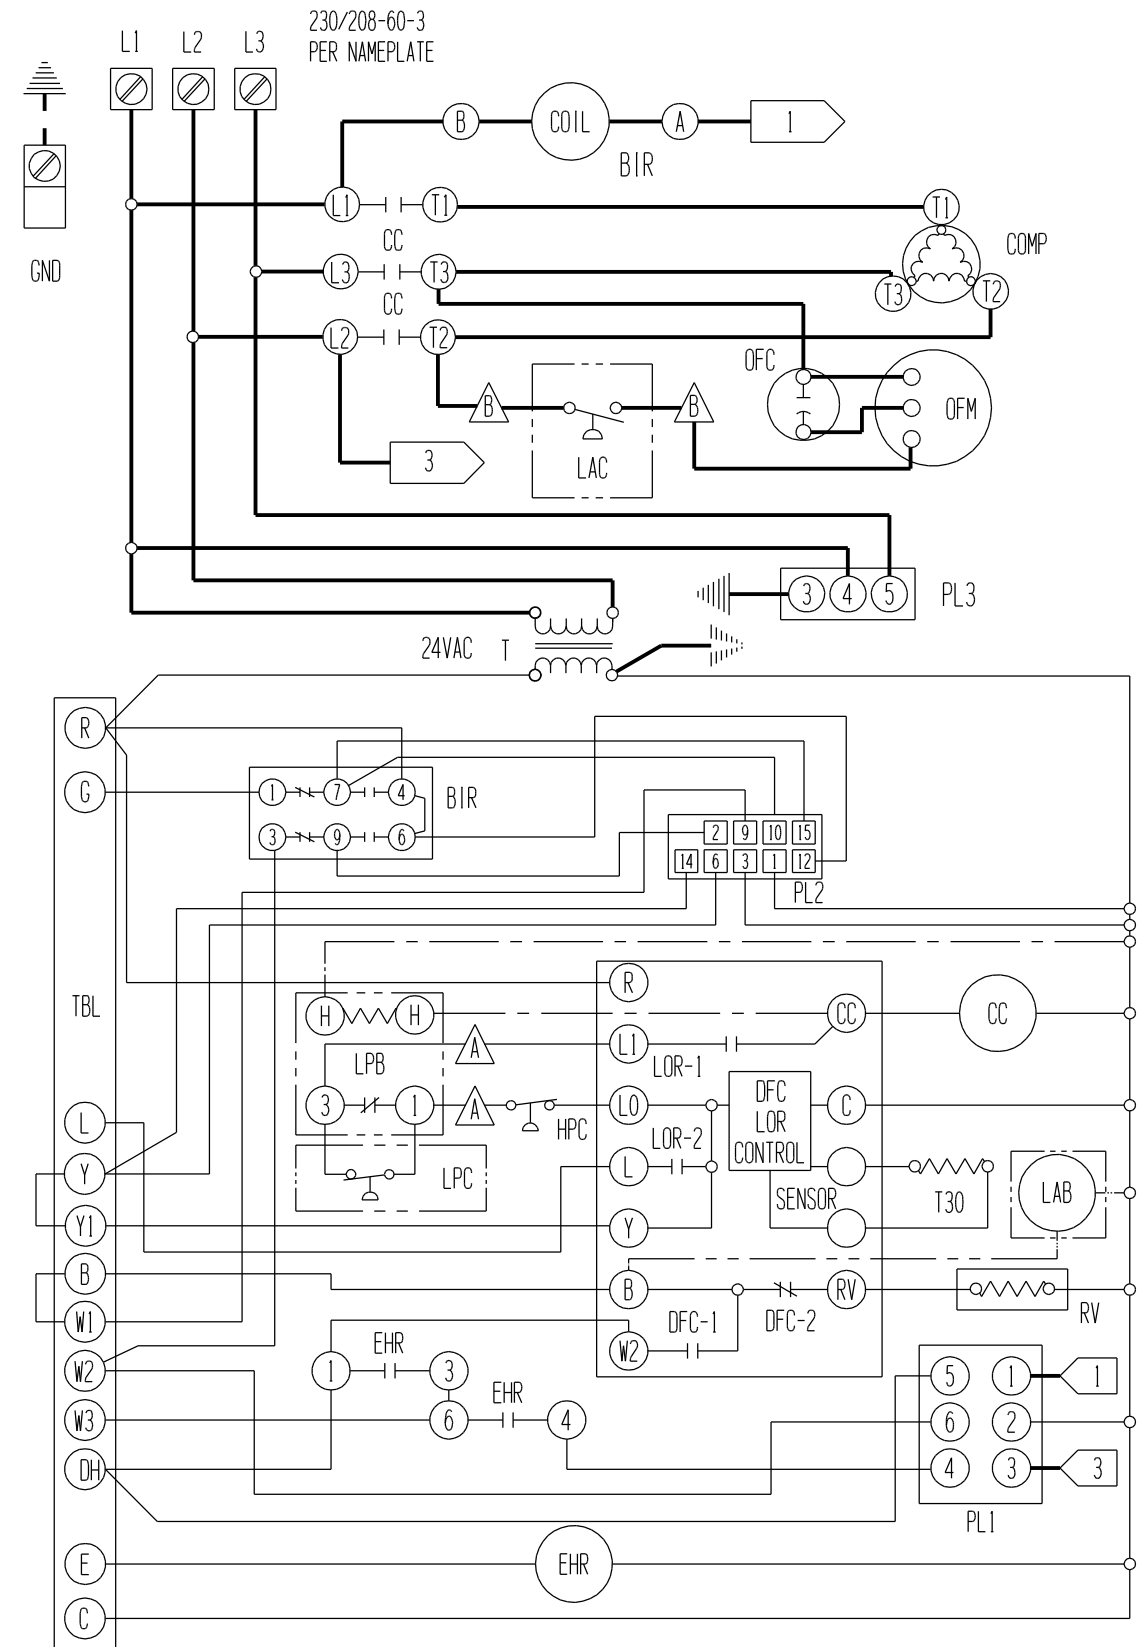


USE COPPER CONDUCTORS ONLY  
SUITABLE FOR AT LEAST 75° C

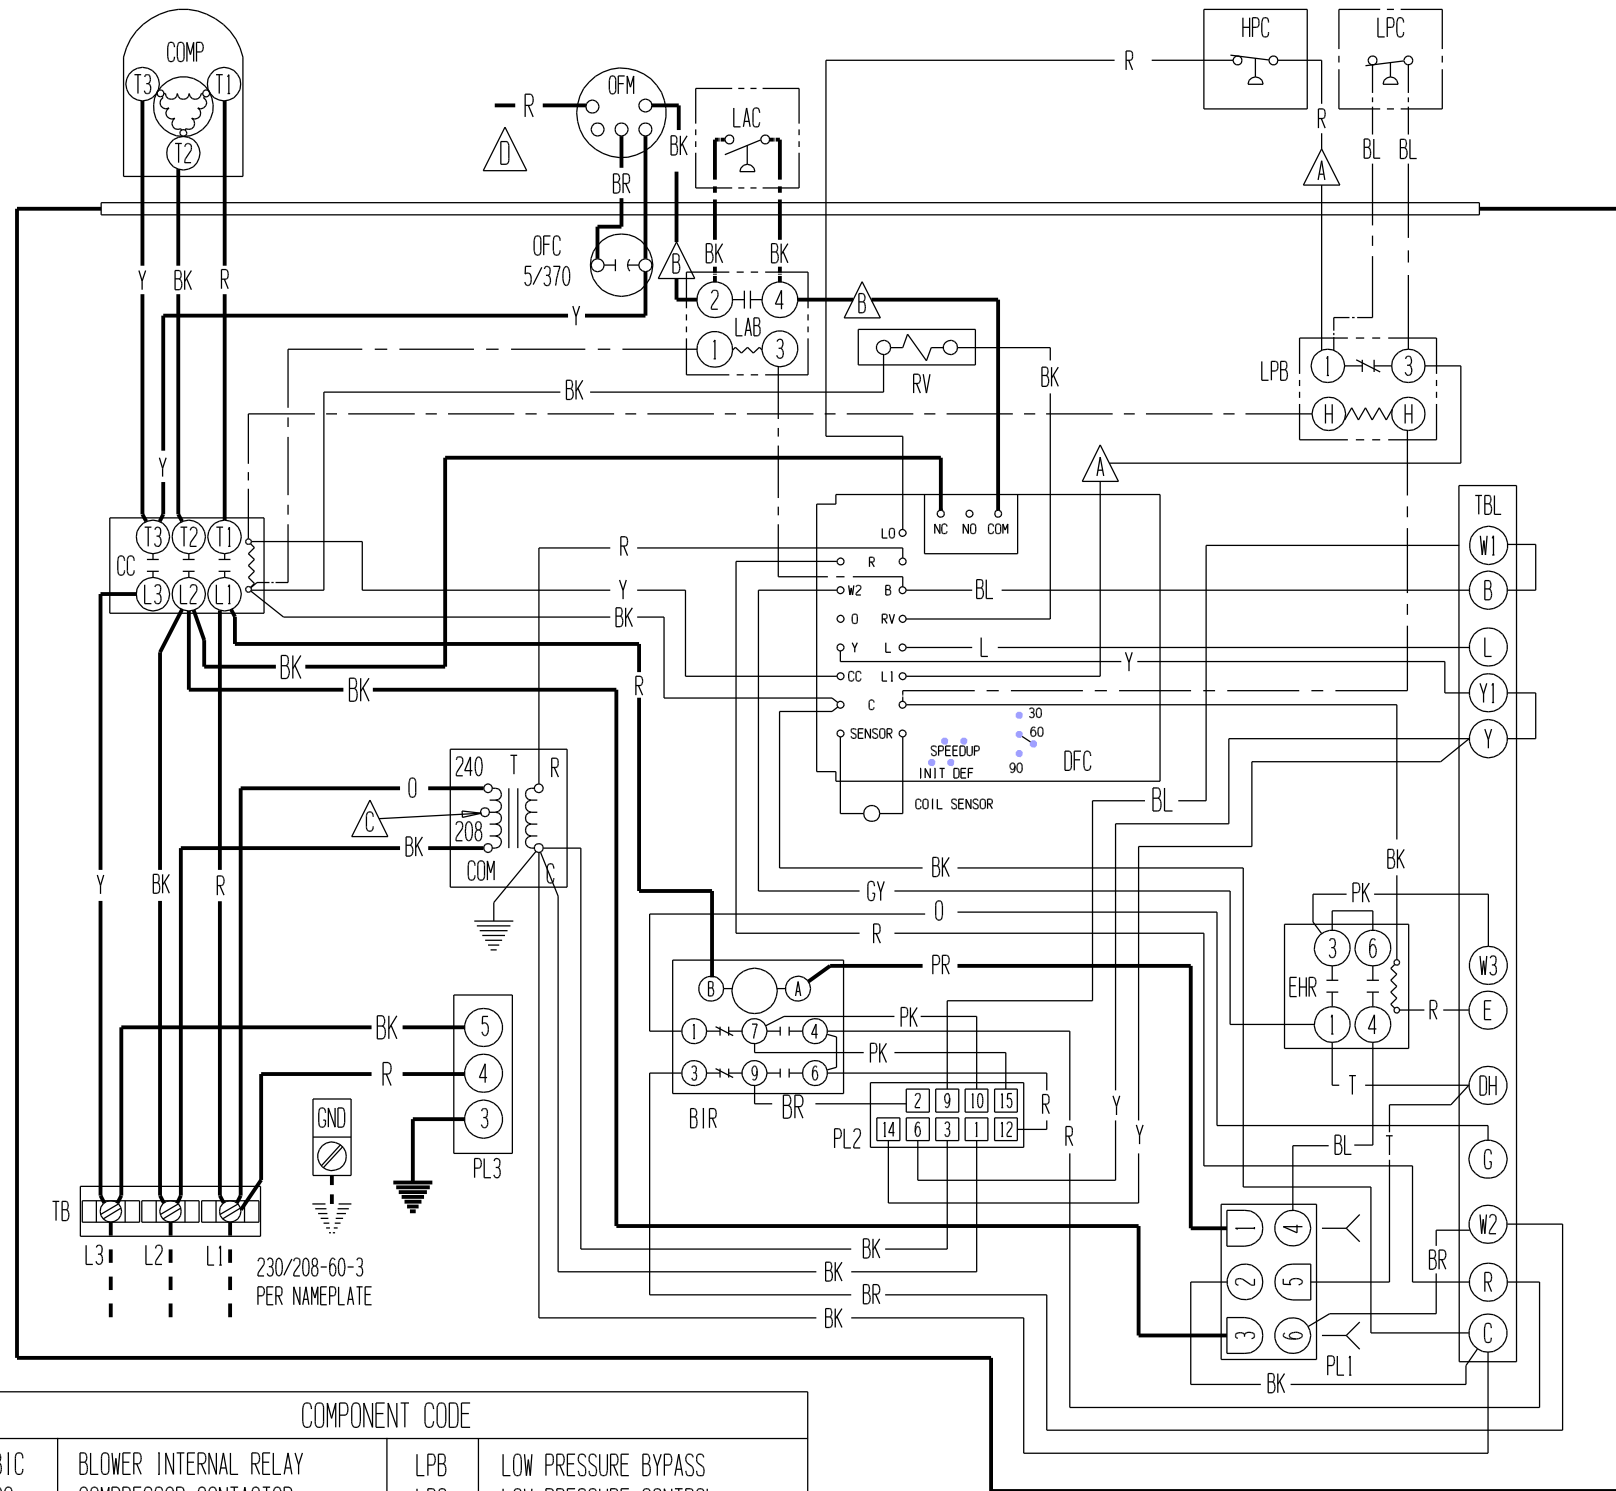

COMPONENT CODE			
BIC	BLOWER INTERNAL RELAY	LPB	LOW PRESSURE BYPASS
CC	COMPRESSOR CONTACTOR	LPC	LOW PRESSURE CONTROL
COMP	COMPRESSOR	OFM	OUTDOOR FAN MOTOR
DFC	DEFROST CONTROL	PL1	PLUG #1
EHR	EMERGENCY HEAT RELAY	PL2	PLUG #2
GND	EQUIPMENT GROUND	PL3	PLUG #3
HPC	HIGH PRESSURE CONTROL	RV	REV. VALVE SOLINOID
IBC	INDOOR BLOWER CAPACITOR	TCT	TOP CAP THERMOSTAT
IBM	INDOOR BLOWER MOTOR	T	TRANSFORMER
IBR	INDOOR BLOWER RELAY	TB	TERMINAL BLOCK
LAB	LOW AMBIENT BYPASS CONTROL	TBL	LOW VOLTAGE TERMINAL BLOCK
LAC	LOW AMBIENT CONTROL	OFC	OUTDOOR FAN CAPACITOR

A , B LABELED WIRES CONNECT IF NO OPTIONS USED. C MOVE RED WIRE TO 208V TAP FOR 208V OPERATION D BLACK (HIGH), RED (LOW) WHERE APPLICABLE

HIGH VOLTAGE				LOW VOLTAGE				ACCESSORY			
FACTORY STD.	FIELD	OPTIONAL	FACTORY STD.	FIELD	OPTIONAL	FACTORY STD.	FIELD	OPTIONAL	FACTORY STD.	FIELD	OPTIONAL
—	---	----	—	---	----	—	---	----	—	---	----

COLOR CODE							
BK	BLACK	Y	YELLOW	V	VIOLET	T	TAN
BR	BROWN	G	GREEN	(PR)	PURPLE	PK	PINK
R	RED	BL	BLUE	GY	GRAY	L	LAVENDER
O	ORANGE	W	WHITE	(S)	SLATE		

**BARD MFG. CO.**  
4098-212