


Standard Diagram

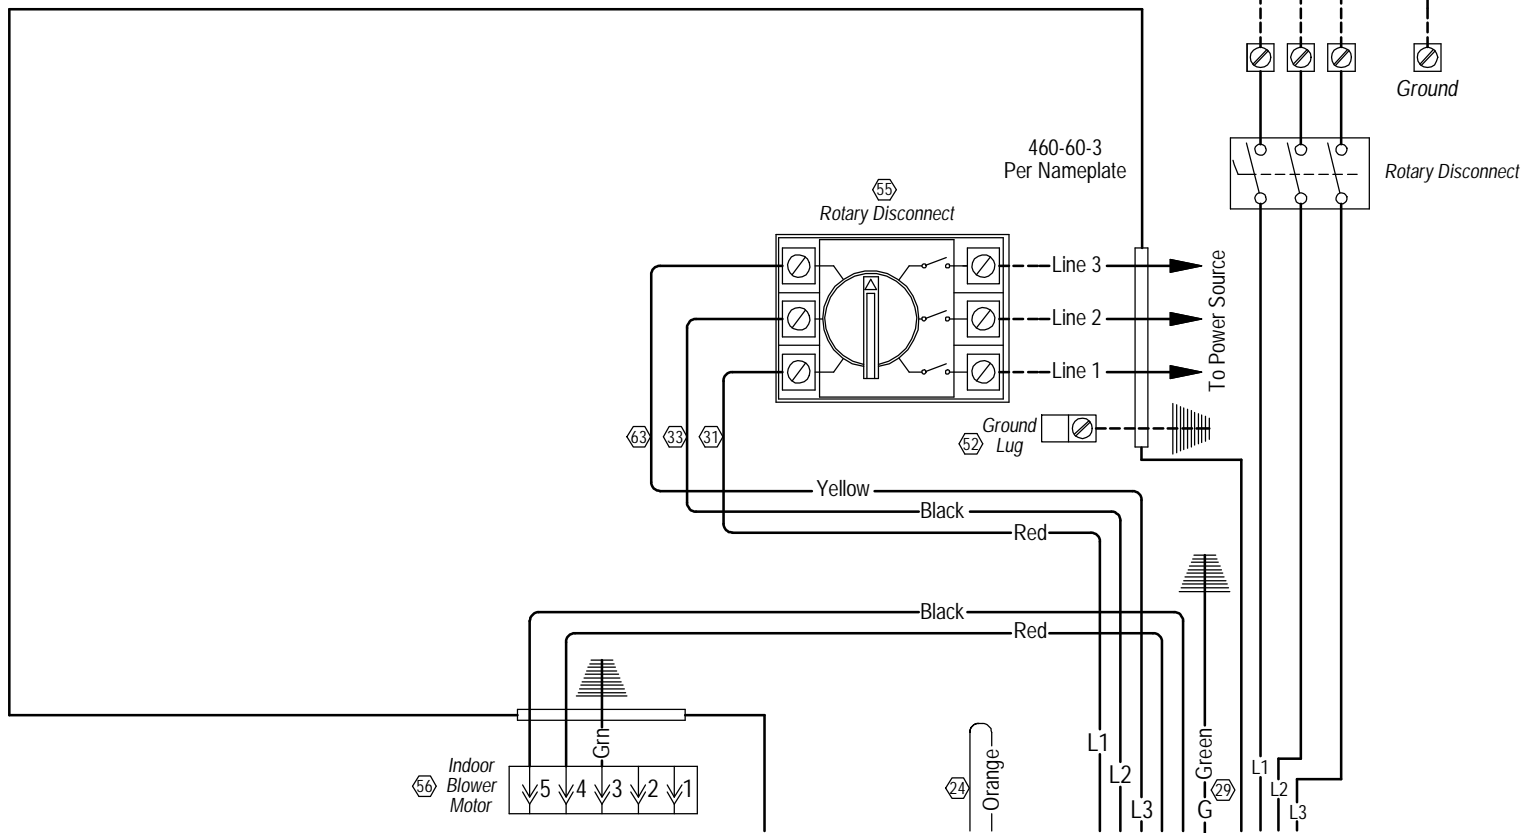

460-60-3  
Per Nameplate

4101-310  
Ladder Diagram

**WARNING**  
USE COPPER CONDUCTORS  
ONLY SUITABLE FOR AT LEAST  
75° C.

