


240/208-60-1

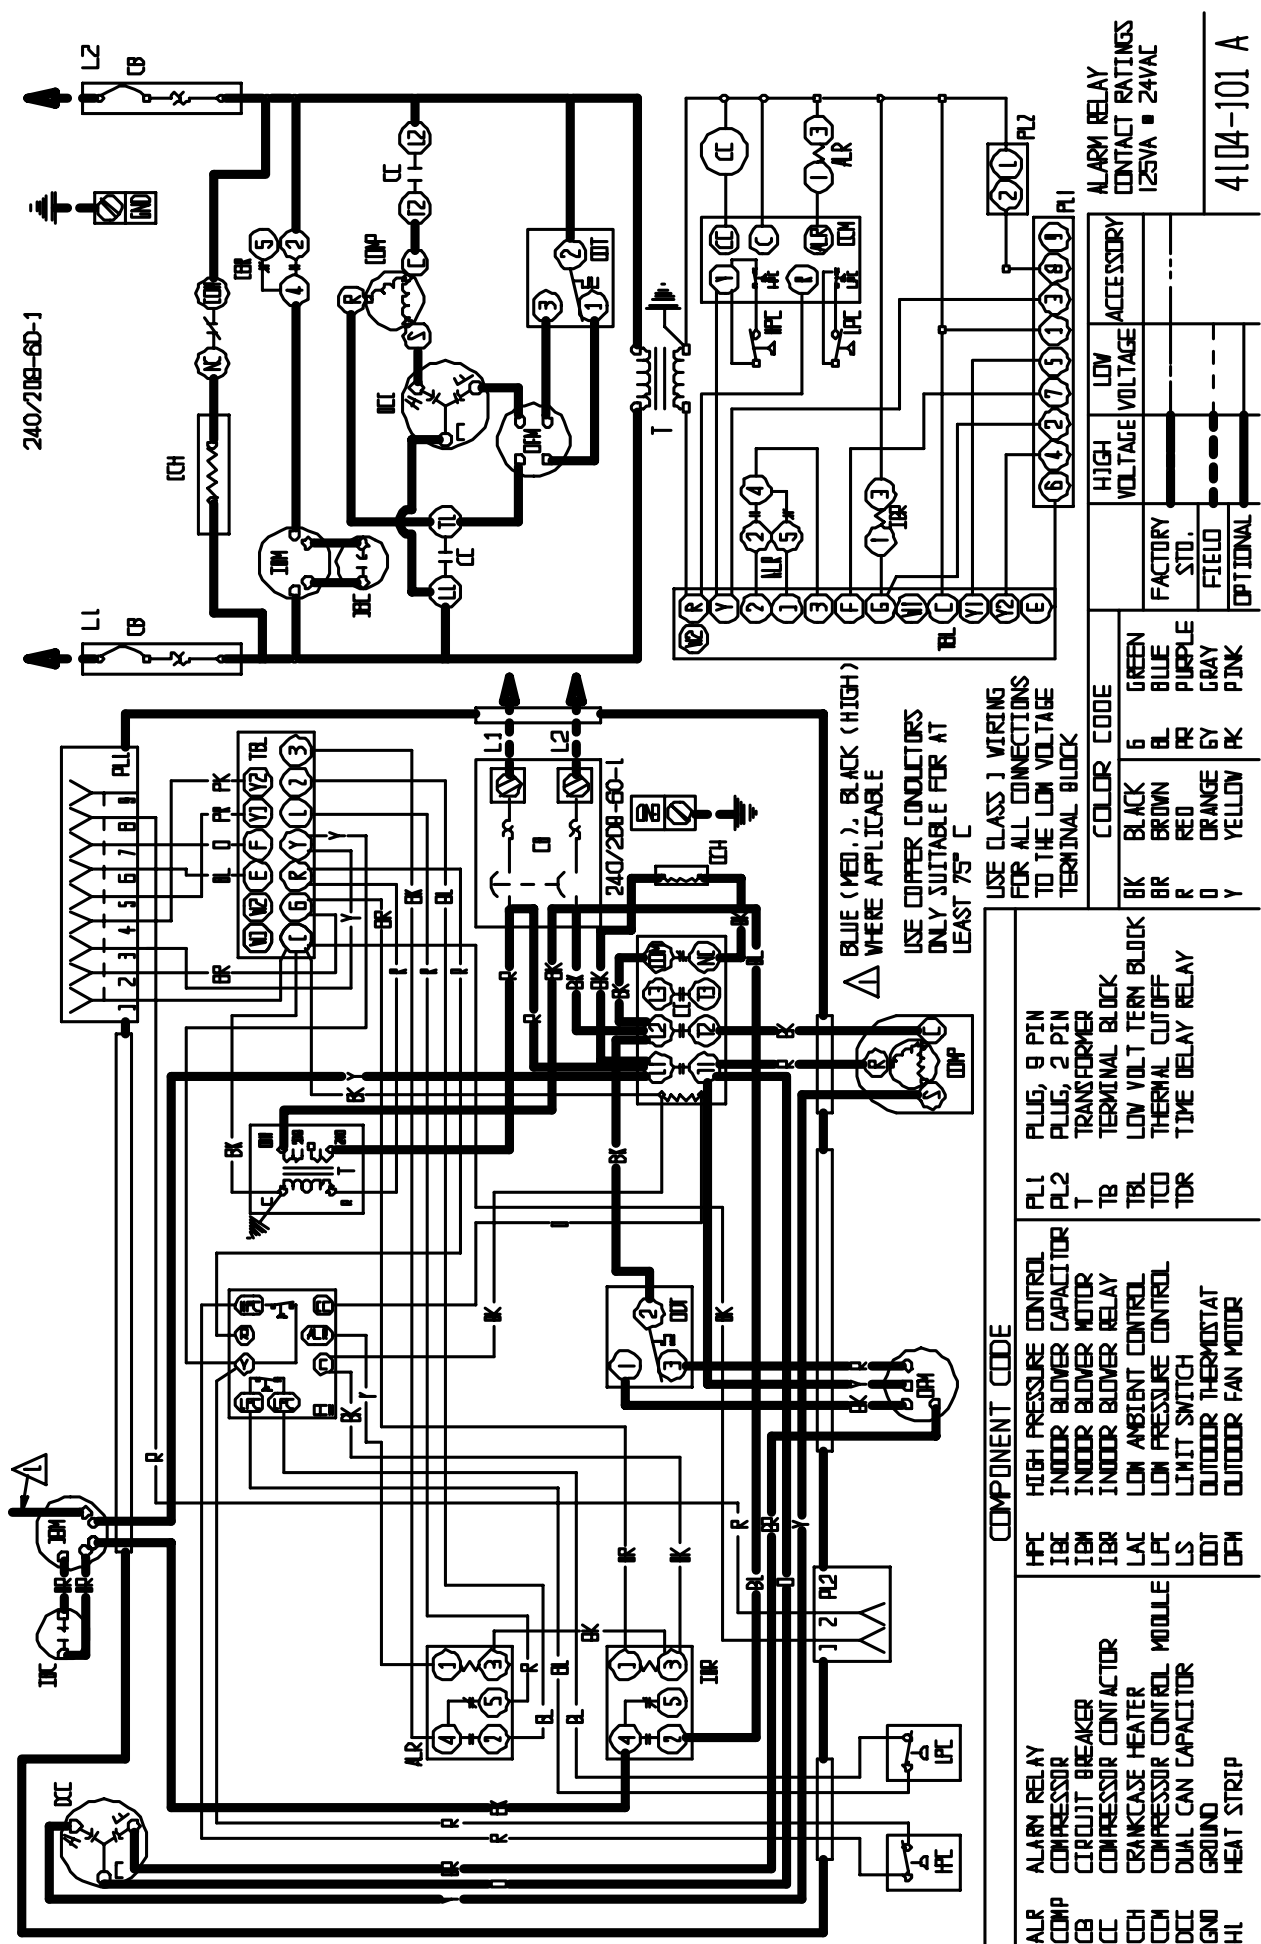

USE CLASS 1 WIRING FOR ALL CONNECTIONS TO THE LOW VOLTAGE TERMINAL BLOCK

BLUE (MED.), BLACK (HIGH) WHERE APPLICABLE

USE COPPER CONDUCTORS ONLY SUITABLE FOR AT LEAST 75° C

COMPONENT CODE

ALR	ALARM RELAY	PL1	PLUG, 8 PIN
COMP	COMPRESSOR	PL2	PLUG, 2 PIN
CB	CIRCUIT BREAKER	T	TERMINAL BLOCK
CC	COMPRESSOR CONTACTOR	TB	TERMINAL BLOCK
CCH	CRANKCASE HEATER	TBL	LOW VOLT TERM BLOCK
CCM	COMPRESSOR CONTROL MOTOR	TCO	THERMAL OFF
DCC	DUAL CAN CAPACITOR	TOR	TIME DELAY RELAY
GN	GROUND		
HS	HEAT STRIP		
HFC	HIGH PRESSURE CONTROL		
IBC	INDOOR BLOWER CAPACITOR		
IBM	INDOOR BLOWER MOTOR		
IBR	INDOOR BLOWER RELAY		
LAC	LOW AMBIENT CONTROL		
LPC	LOW PRESSURE CONTROL		
LS	LIMIT SWITCH		
ODT	OUTDOOR THERMOSTAT		
OPM	OUTDOOR FAN MOTOR		

COLOR CODE	FACTORY STD.	FIELD	OPTIONAL
BLACK	BL	BR	BY
BROWN	BR	RD	OR
RED	R	OR	YK
ORANGE	O	OR	PK
YELLOW	Y	OR	PK
GREEN	G	GR	PK
BLUE	BL	GR	PK
PURPLE	PR	GR	PK
GRAY	GY	GR	PK
PINK	PK	GR	PK

ALARM RELAY CONTACT RATINGS 125VA @ 24VAC

4104-101 A

