

BLUE (MED.), BLACK (HIGH)  
WHERE APPLICABLE


USE COPPER CONDUCTORS  
ONLY SUITABLE FOR AT  
LEAST 75° C

USE CLASS 1 WIRING  
FOR ALL CONNECTIONS  
TO THE LOW VOLTAGE  
TERMINAL BLOCK

COMPONENT CODE		COLOR CODE		FACTORY STD.		FIELD		OPTIONAL	
ALR	ALARM RELAY	BK	BLACK	6	GREEN				
COMP	COMPRESSOR	BR	BROWN	BL	BLUE				
CB	CIRCUIT BREAKER	R	RED	PR	PURPLE				
CC	COMPRESSOR CONTACTOR	O	ORANGE	GY	GRAY				
CH	CRANKCASE HEATER	Y	YELLOW	PK	PINK				
CLM	COMPRESSOR CONTROL								
DCC	DUAL CAN CAPACITOR								
GND	GROUND								
HS	HEAT STRIP								
HFC	HIGH PRESSURE CONTROL	PL1							
IBC	INDOOR BLOWER CAPACITOR	PL2							
IBM	INDOOR BLOWER MOTOR	T							
IBR	INDOOR BLOWER RELAY	TB							
LAC	LOW AMBIENT CONTROL	TBL							
LFC	LOW PRESSURE CONTROL	TCD							
LS	LIMIT SWITCH	TDR							
OOT	OUTDOOR THERMOSTAT								
OPM	OUTDOOR FAN MOTOR								
PL1	HIGH PRESSURE CONTROL								
PL2	INDOOR BLOWER CAPACITOR								
T	TRANSFORMER								
TB	TERMINAL BLOCK								
TBL	LOW VOLT. TERM. BLOCK								
TCD	THERMAL CUTOFF								
TDR	TIME DELAY RELAY								
TR	TRIP								
TDR	TIME DELAY RELAY								
ALR	ALARM RELAY								
CC	COMPRESSOR CONTACTOR								
CH	CRANKCASE HEATER								
CLM	COMPRESSOR CONTROL								
DCC	DUAL CAN CAPACITOR								
GND	GROUND								
HS	HEAT STRIP								
HFC	HIGH PRESSURE CONTROL								
IBC	INDOOR BLOWER CAPACITOR								
IBM	INDOOR BLOWER MOTOR								
IBR	INDOOR BLOWER RELAY								
LAC	LOW AMBIENT CONTROL								
LFC	LOW PRESSURE CONTROL								
LS	LIMIT SWITCH								
OOT	OUTDOOR THERMOSTAT								
OPM	OUTDOOR FAN MOTOR								
PL1	HIGH PRESSURE CONTROL								
PL2	INDOOR BLOWER CAPACITOR								
T	TRANSFORMER								
TB	TERMINAL BLOCK								
TBL	LOW VOLT. TERM. BLOCK								
TCD	THERMAL CUTOFF								
TDR	TIME DELAY RELAY								
TR	TRIP								

ALARM RELAY  
CONTACT RATINGS  
125VA @ 24VAC

4104-121 A

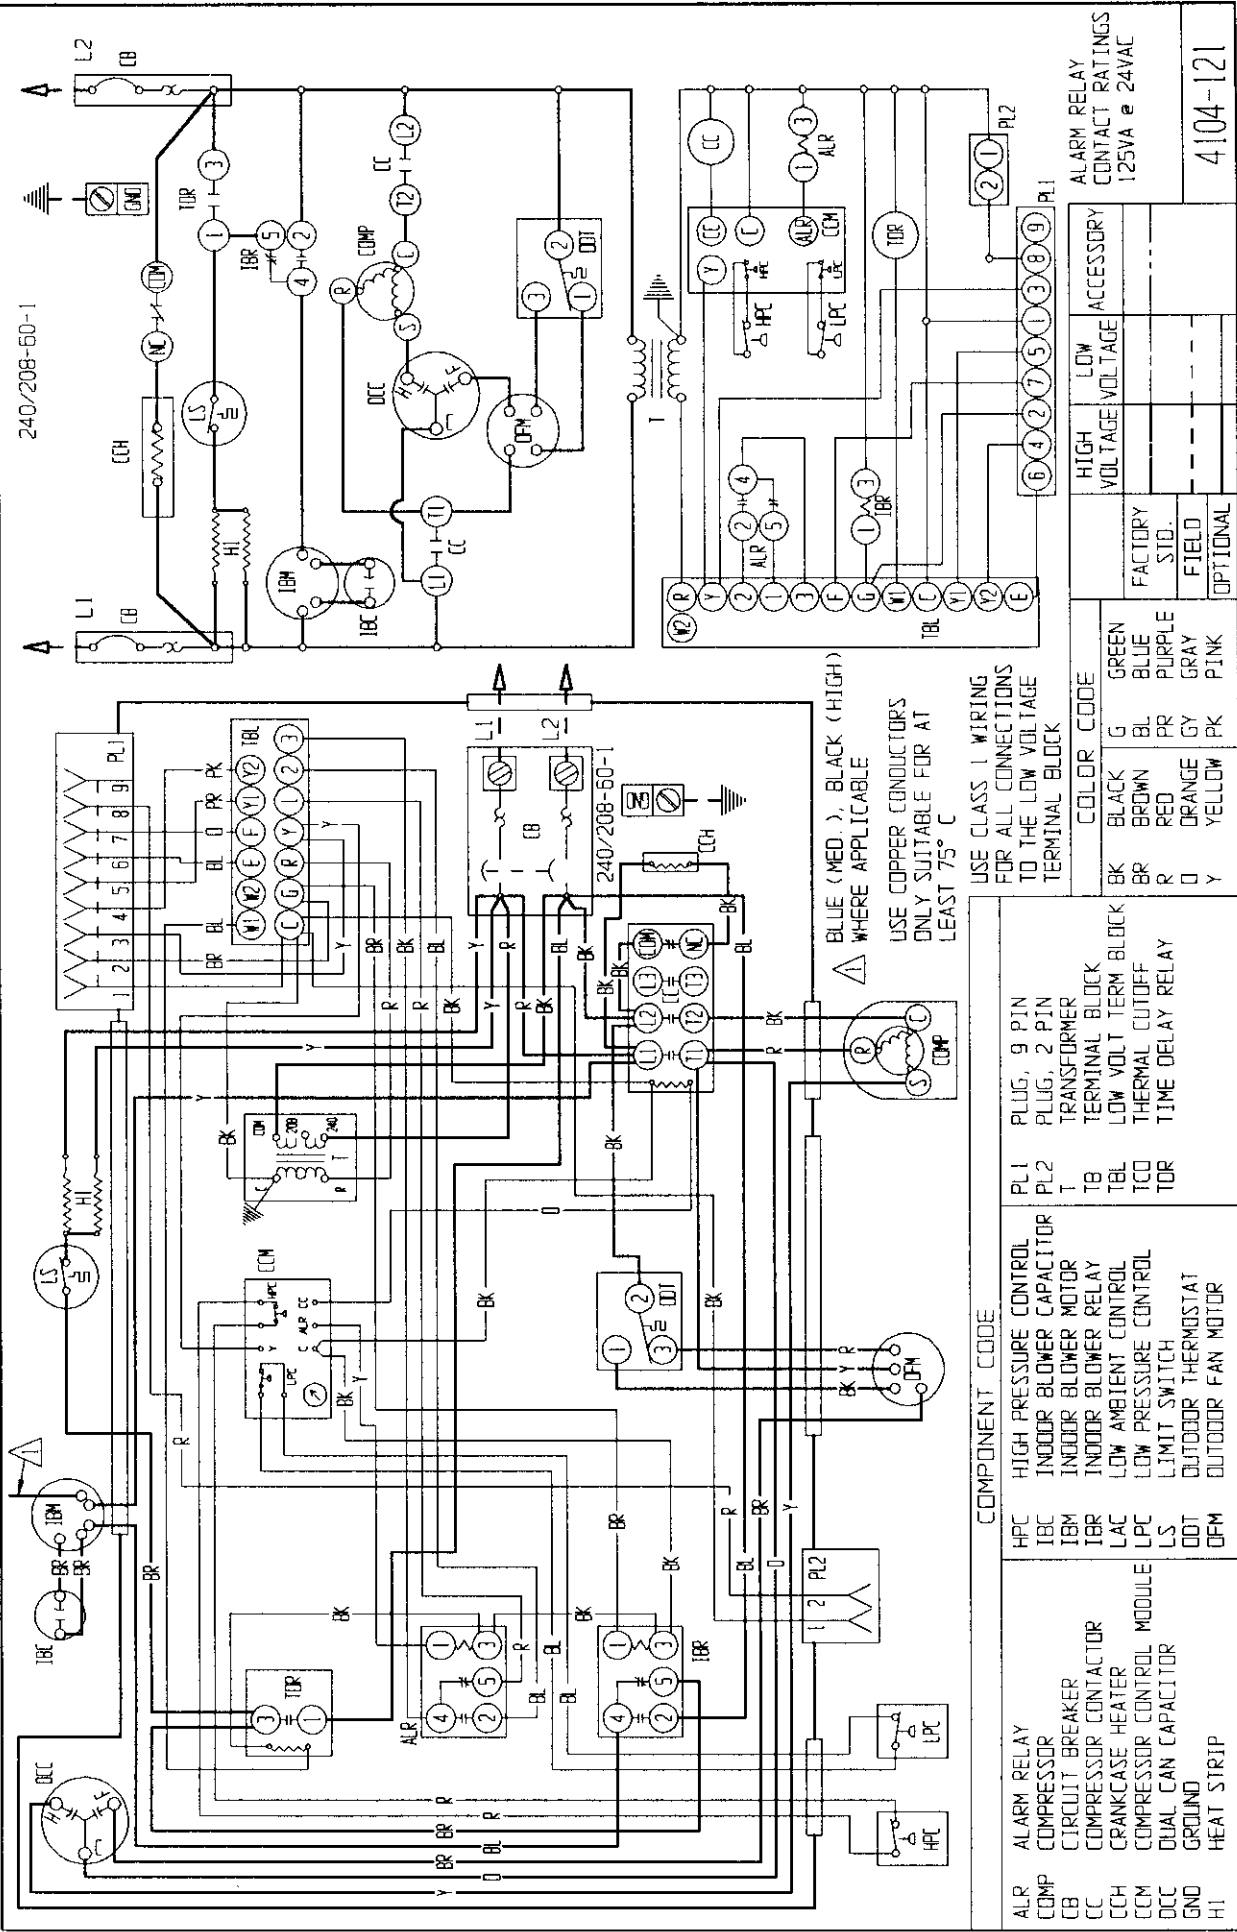

ALRM RELAY	ALARM RELAY
COMP	COMPRESSOR
CB	CIRCUIT BREAKER
CC	COMPRESSOR CONTACTOR
CCH	COMPRESSOR HEATER
CCM	COMPRESSOR CONTROL MODULE
DCC	DUAL CAN CAPACITOR
GND	GROUND
HI	HEAT STRIP

PL1	HIGH VOLTAGE	ACCESSORY
PL2	LOW VOLTAGE	
TB	FACTORY STD.	
TBL	FIELD	
TOR	OPTIONAL	

BK	BLACK	GREEN
BR	BROWN	BLUE
R	RED	PURPLE
O	ORANGE	GRAY
Y	YELLOW	PINK

ALARM RELAY CONTACT RATINGS 125VA @ 24VAC

4104-121

USE CLASS 1 WIRING FOR ALL CONNECTIONS TO THE LOW VOLTAGE TERMINAL BLOCK

BLUE (MED.), BLACK (HIGH) WHERE APPLICABLE

USE COPPER CONDUCTORS ONLY SUITABLE FOR AT LEAST 75° C

COMPONENT CODE	
ALRM	ALARM RELAY
COMP	COMPRESSOR
CB	CIRCUIT BREAKER
CC	COMPRESSOR CONTACTOR
CCH	COMPRESSOR HEATER
CCM	COMPRESSOR CONTROL MODULE
DCC	DUAL CAN CAPACITOR
GND	GROUND
HI	HEAT STRIP
IBM	INDOOR BLOWER MOTOR
IBR	INDOOR BLOWER RELAY
LAC	LOW AMBIENT CONTROL
LPC	LOW PRESSURE CONTROL
LS	LIMIT SWITCH
DDT	OUTDOOR THERMOSTAT
OFM	OUTDOOR FAN MOTOR
PL1	HIGH PRESSURE CONTROL PLUG, 9 PIN
PL2	LOW PRESSURE CONTROL PLUG, 2 PIN
T	TRANSFORMER
TBL	TERMINAL BLOCK
TCD	LOW VOLT TERM BLOCK
TOR	THERMAL CUTOFF
OFM	TIME DELAY RELAY

PL1 PLUG, 9 PIN  
PL2 PLUG, 2 PIN  
T TRANSFORMER  
TB TERMINAL BLOCK  
TBL LOW VOLT TERM BLOCK  
TCD THERMAL CUTOFF  
TOR TIME DELAY RELAY

HPC	HIGH PRESSURE CONTROL
IBM	INDOOR BLOWER MOTOR
IBR	INDOOR BLOWER RELAY
LAC	LOW AMBIENT CONTROL
LPC	LOW PRESSURE CONTROL
LS	LIMIT SWITCH
DDT	OUTDOOR THERMOSTAT
OFM	OUTDOOR FAN MOTOR