



Standard Diagram

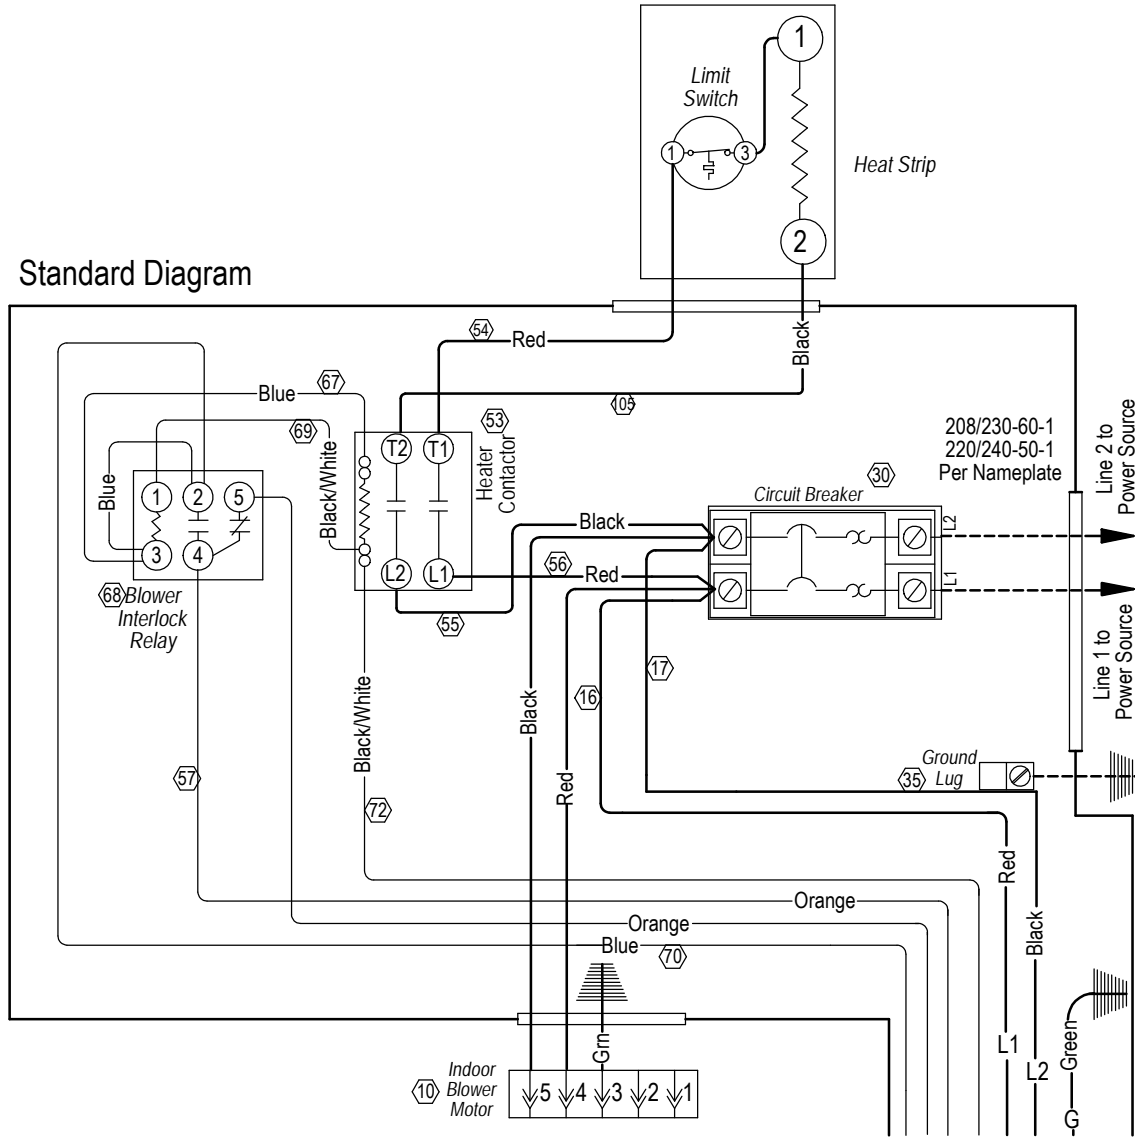

WARNING
 USE COPPER CONDUCTORS
 ONLY SUITABLE FOR AT LEAST
 75° C.

4108-105 A

Ladder Diagram

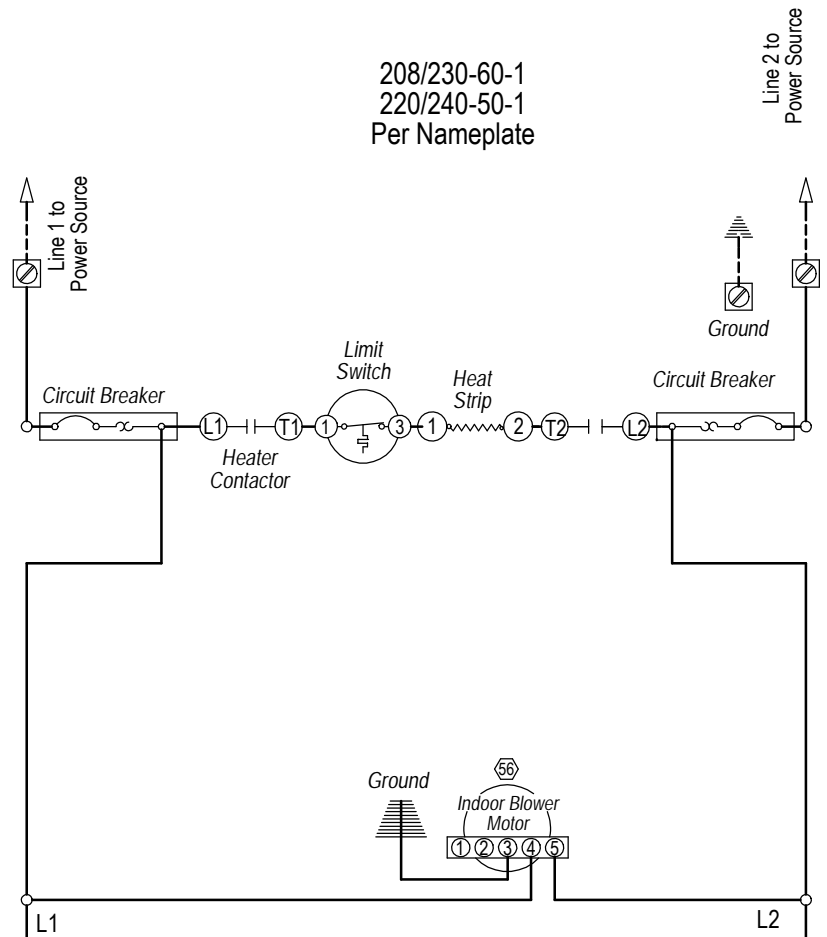

208/230-60-1
 220/240-50-1
 Per Nameplate

Line 2 to
 Power Source

Ground

Ground

Indoor Blower
 Motor

L2

L1