


Standard Diagram

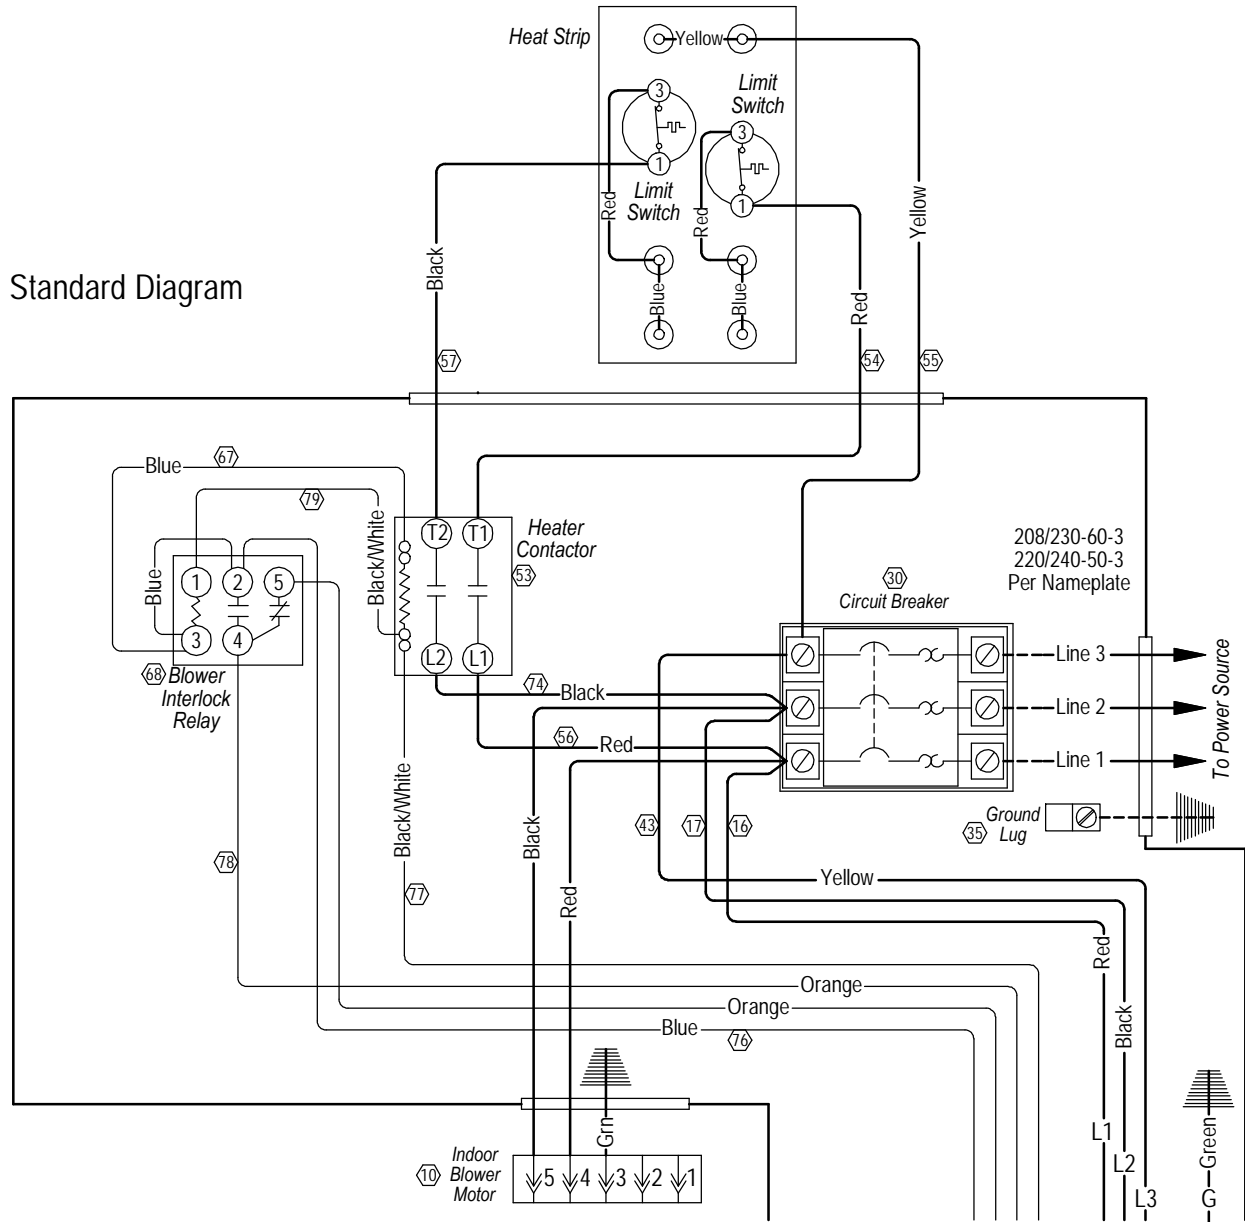

208/230-60-3
220/240-50-3
Per Nameplate

4108-205
Ladder Diagram

WARNING
USE COPPER CONDUCTORS
ONLY SUITABLE FOR AT LEAST
75° C.

