


**WARNING**  
 USE COPPER CONDUCTORS  
 ONLY SUITABLE FOR AT LEAST  
 75° C.

**DANGER**  
 ELECTRICAL SHOCK HAZARD  
 DISCONNECT POWER BEFORE  
 SERVICING.

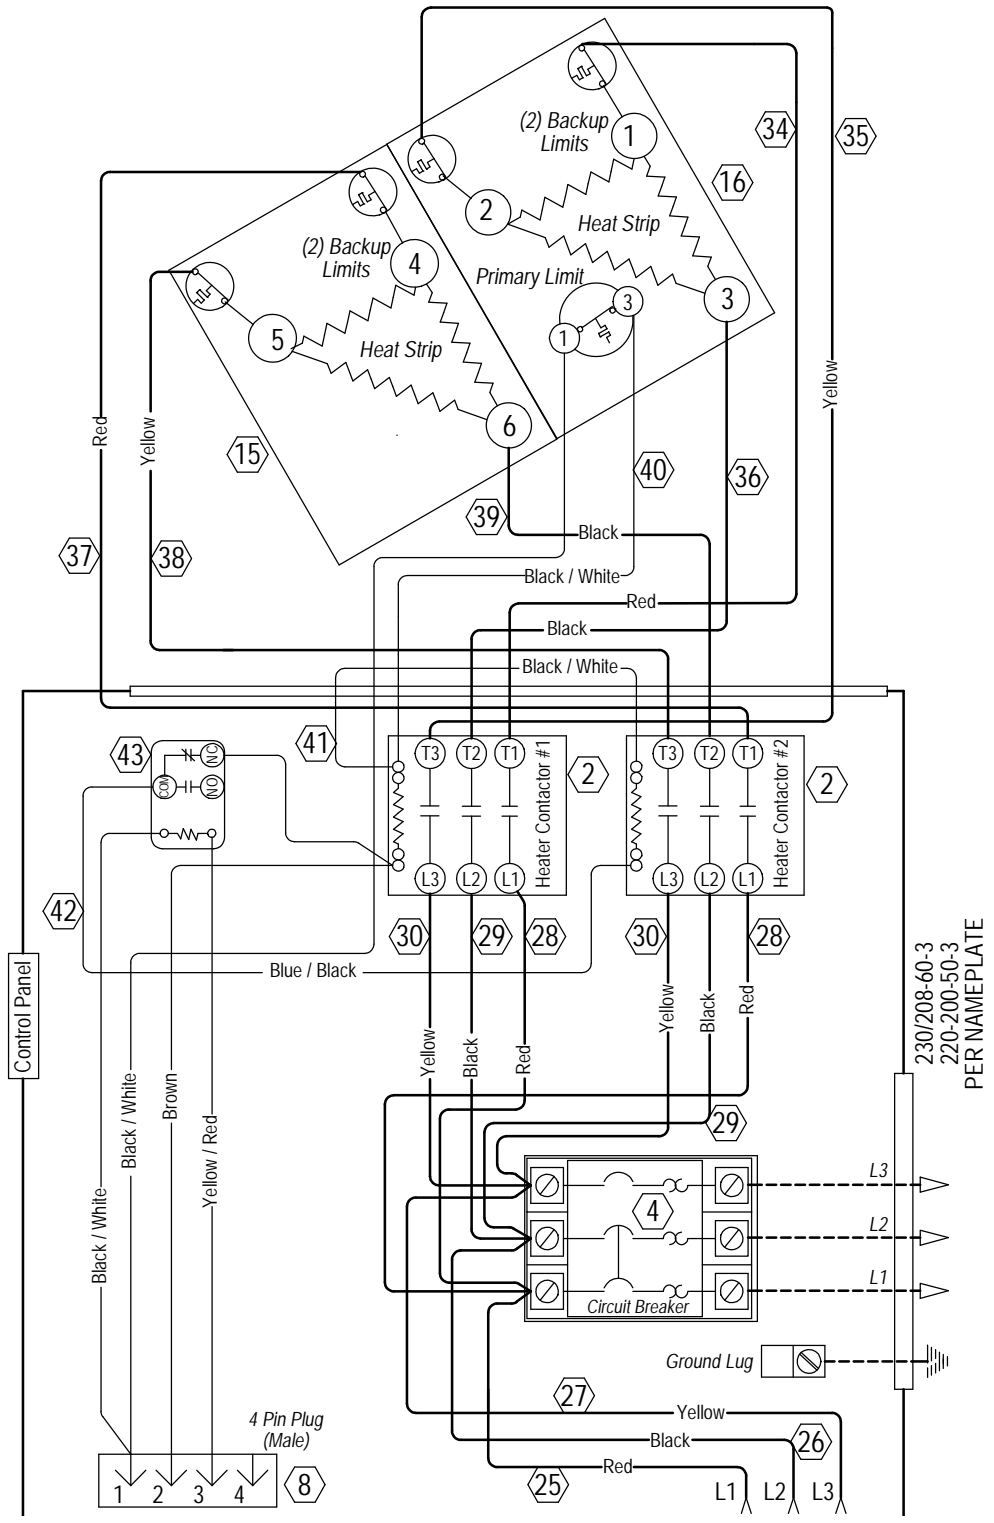

230/208-60-3  
 220-200-50-3  
 PER NAMEPLATE