



# 208/240-60-1 Line Power Per Nameplate



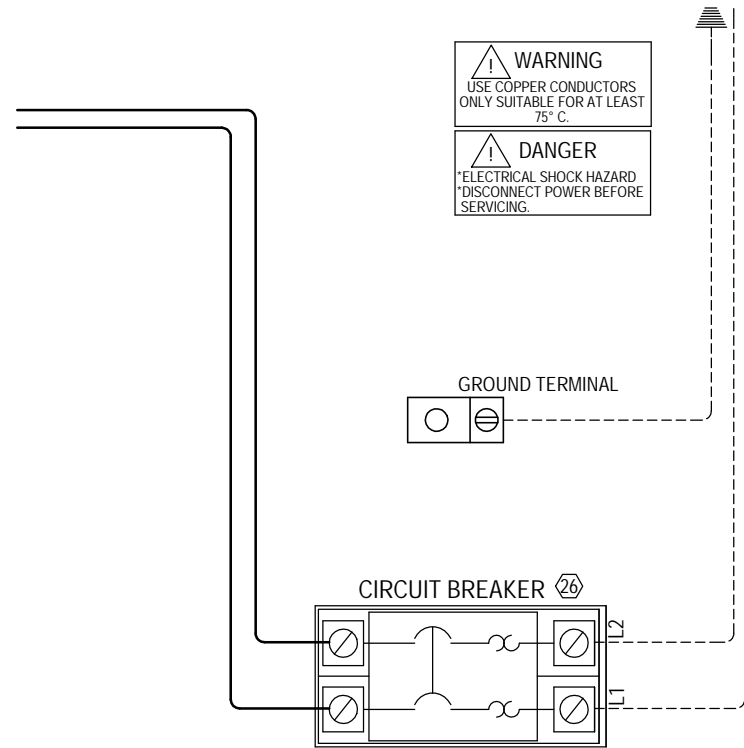

**WARNING**  
 USE COPPER CONDUCTORS  
 ONLY SUITABLE FOR AT LEAST  
 75° C.


**DANGER**  
 \*ELECTRICAL SHOCK HAZARD  
 \*DISCONNECT POWER BEFORE  
 SERVICING.

GROUND TERMINAL

CIRCUIT BREAKER 

 THIS WIRE IS TAPED-OFF IN  
 LOW VOLTAGE TERMINAL BOX.  
 SEE LOW VOLTAGE WIRING SECTION  
 IN INSTALLATION MANUAL.

 FOR 208 VOLT OPERATION,  
 MOVE THIS RED WIRE TO  
 208 VOLT TRANSFORMER TAP

 Wire Identification numbers  
 for Bard use only.

	Factory	Field	Optional
High Voltage		---	---
Low Voltage		---	---