


460-60-3 Line Power Per Nameplate

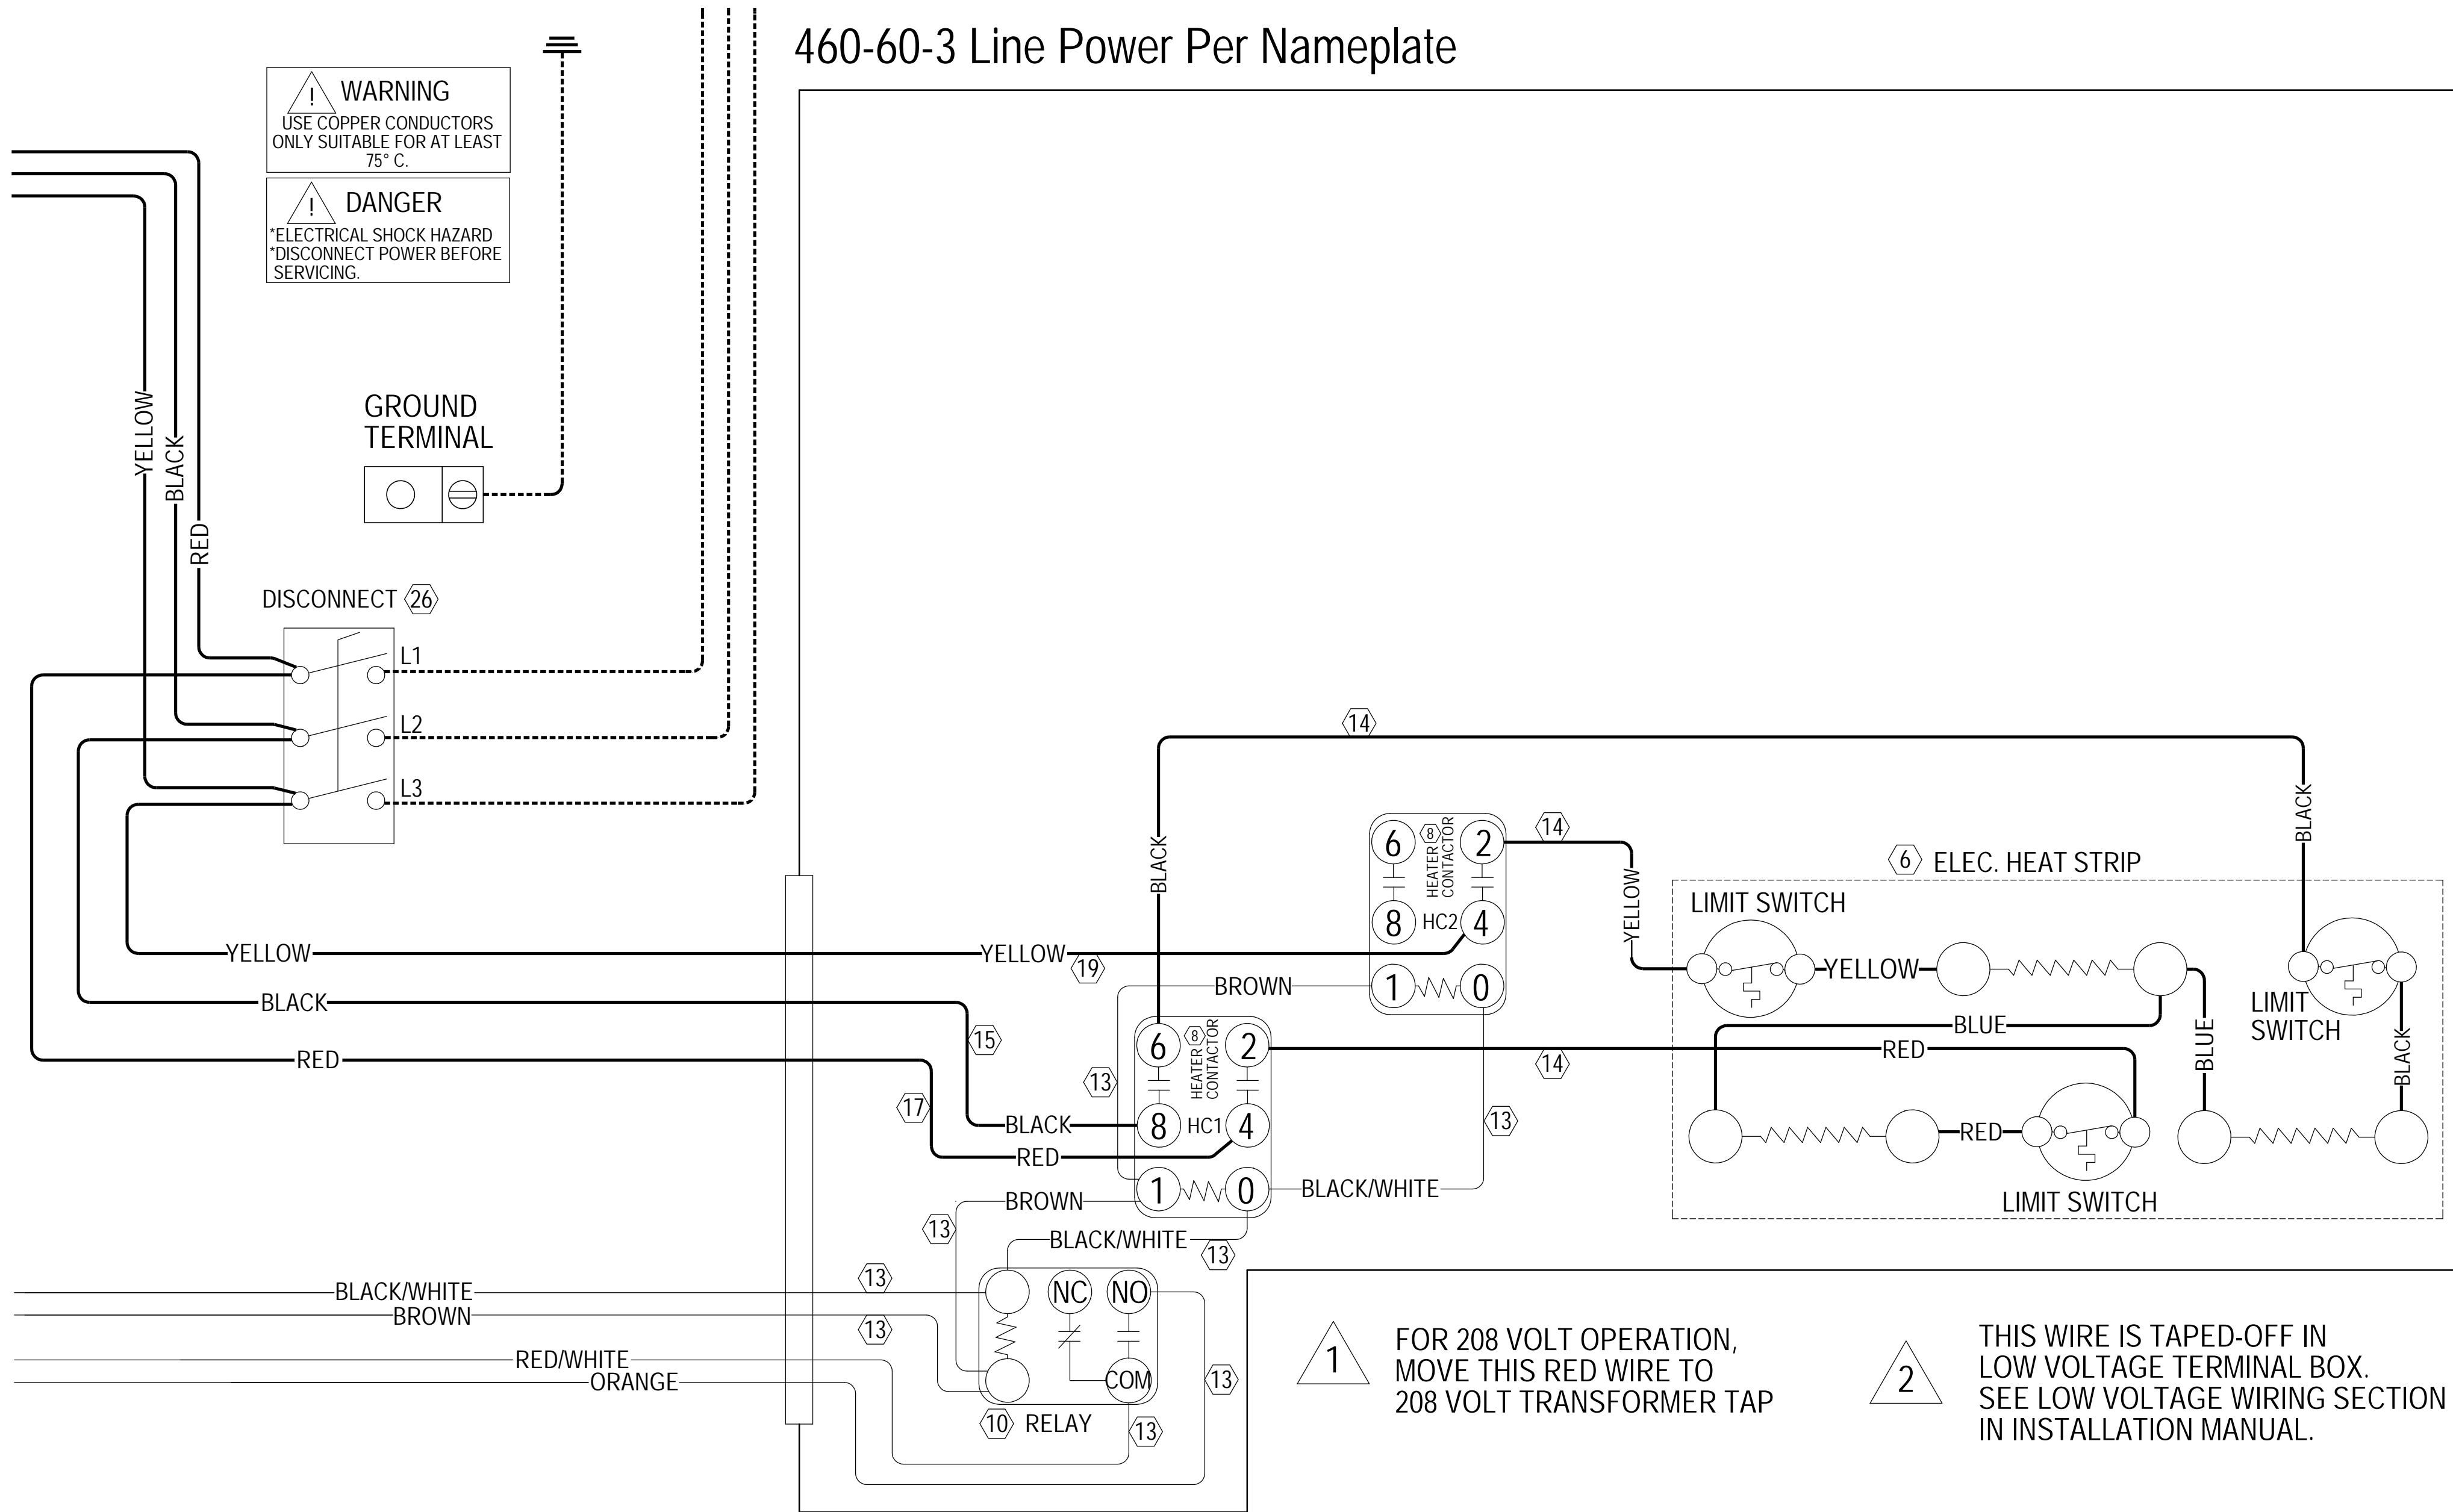

WARNING
USE COPPER CONDUCTORS
ONLY SUITABLE FOR AT LEAST
75° C.

DANGER
*ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE
SERVICING.

GROUND
TERMINAL

DISCONNECT (26)
L1
L2
L3

1 FOR 208 VOLT OPERATION,
MOVE THIS RED WIRE TO
208 VOLT TRANSFORMER TAP

2 THIS WIRE IS TAPED-OFF IN
LOW VOLTAGE TERMINAL BOX.
SEE LOW VOLTAGE WIRING SECTION
IN INSTALLATION MANUAL.

(99) Wire Identification numbers
for Bard use only.

	Factory	Field	Optional
High Voltage			
Low Voltage			